

S62 FULLY LUGGED TYPE BUTTERFLY VALVE

Pressure class. 16 bar

Design according EN 593

Face to face Wafer short,

acc. EN558-1/2 Series 20 / API 609 A

Flange connections options: EN 1092 PN 6, 10 and 16

ASME B16.5 cl. 150

JIS 5K/10K/16K



Material options: Body material Ductile iron EN-JS1030

Disc material Stainless steel 1.4408 or B148 C954

Shaft material SS 416

Liner material EPDM / NBR – Cartridge design

Lever material JS1030 with steel Notch plate

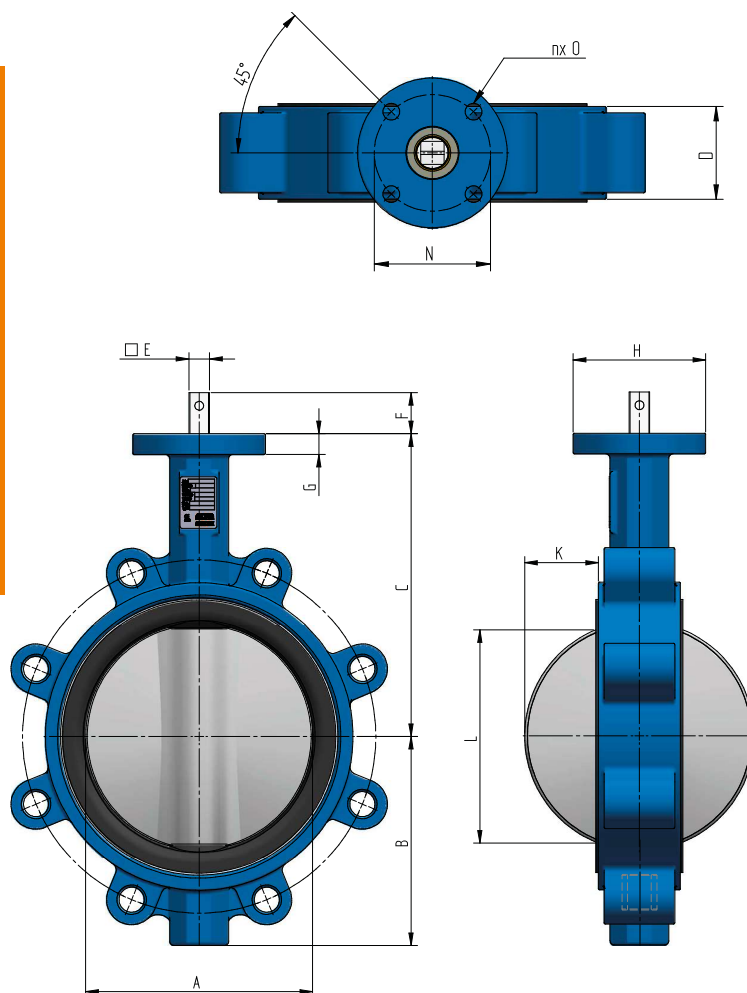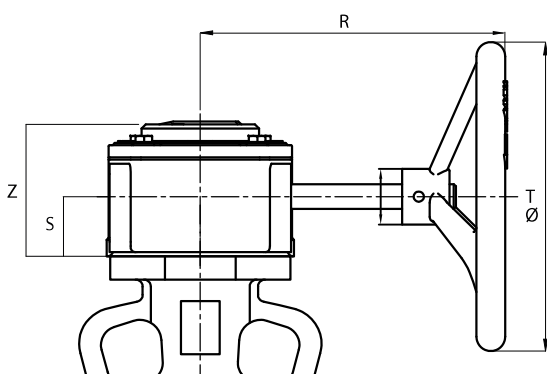

DN	NPS	øA	E	F	B	C	øH	D	M	P	N (PCD)	N x Ø	G	L	K	Weight kg (bare shaft)	Gearbox	R	S	øT	Z
40	1 1/2"	40	11	25	61	130	90	33	232	57,5	70 (F07)	4xØ10	10	23	3,5	2,65	S02-C100	124	32	100	65
50	2"	50	11	25	69	141	90	42	232	57,5	70 (F07)	4xØ10	13	30	4,7	2,75	S02-C100	124	32	100	65
65	2 1/2"	65	11	25	77	150	90	46	232	57,5	70 (F07)	4xØ10	13	49	11	3,1	S02-C100	124	32	100	65
80	3"	80	11	25	98	157	90	46	232	57,5	70 (F07)	4xØ10	13	68	18	3,6	S02-C100	124	32	100	65
100	4"	102	11	25	118	168	90	52	232	57,5	70 (F07)	4xØ10	14	90	26	4,5	S02-C100	124	32	100	65
125	5"	125	14	28	129	191	90	56	329	69	70 (F07)	4xØ10	14	114	35	7,6	S02-C150	124	32	150	65
150	6"	150	14	28	140	206	90	56	329	69	70 (F07)	4xØ10	14	140	47	8,7	S02-C150	124	32	150	65
200	8"	200	17	28	174	237	90	60	329	69	70 (F07)	4xØ10	18	192	70	14,3	S02-C150	124	32	150	65
250	10"	250	22	30	207	269	125	68	n/a	n/a	102 (F10)	4xØ12	18	243	91	20,5	S05-W250	157	36	250	74
300	12"	300	22	30	249	309	125	78	n/a	n/a	102 (F10)	4xØ12	18	293	113	32,5	S05-W250	157	36	250	74