


LUG TYPE S64

GEARBOX OPERATED

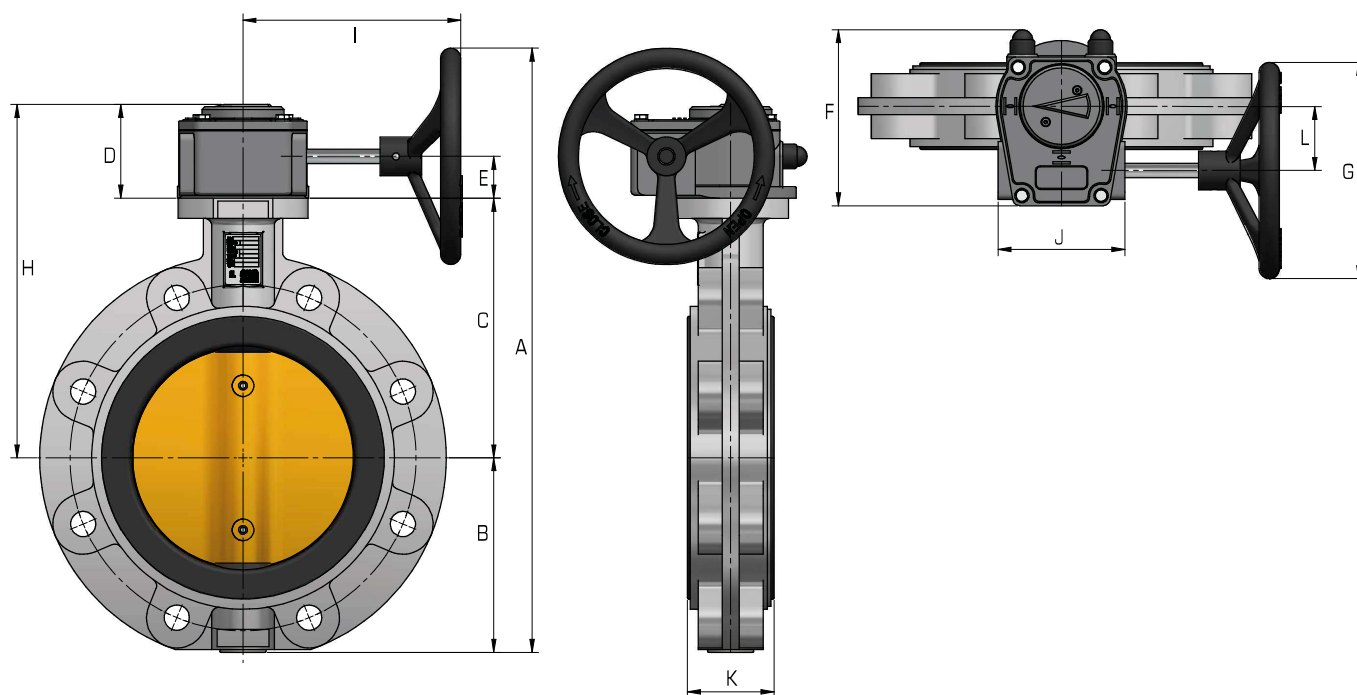

Standard available materials:

| Body | Disc | Shaft | Seat |
|------|------|-------|------|
|------|------|-------|------|

| | | | |
|-----------|------------|-----------|-----|
| EN-JS1030 | BS1400 AB2 | SS 1.4122 | NBR |
|-----------|------------|-----------|-----|

| | | | |
|----------|-----------|--------|------|
| A216 WCB | EN-JS1030 | SS 431 | EPDM |
|----------|-----------|--------|------|

| | | | |
|-----------|-----------|-----------|-------|
| SS 1.4408 | SS 1.4408 | SS 1.4462 | Viton |
|-----------|-----------|-----------|-------|

| | | | |
|------------|---------|--------|----------|
| BS1400 AB2 | SD 2507 | SD F53 | Silicone |
|------------|---------|--------|----------|

Alfa Ductile iron Gearbox with casted "C" series handwheel or steel welded "V" series.


IP68 sealing and stroke adjustment -5° to 95°.

Temperature range between -25°C to 110 °C.

| DN | Gearbox | A | B | C | D | E | F | G | H | I | J | K | L | Weight ± kg |
|-----|----------|-----|-----|-----|----|----|-----|-----|-----|-----|----|----|----|-------------|
| 40 | S02-C100 | 256 | 61 | 113 | 65 | 32 | 115 | 100 | 178 | 141 | 88 | 33 | 45 | 6,6 |
| 50 | S02-C100 | 267 | 67 | 118 | 65 | 32 | 115 | 100 | 183 | 141 | 88 | 43 | 45 | 7,1 |
| 65 | S02-C100 | 282 | 74 | 126 | 65 | 32 | 115 | 100 | 191 | 141 | 88 | 46 | 45 | 8,1 |
| 80 | S02-C100 | 297 | 82 | 133 | 65 | 32 | 115 | 100 | 198 | 141 | 88 | 46 | 45 | 8,7 |
| 100 | S02-C100 | 329 | 100 | 147 | 65 | 32 | 115 | 100 | 212 | 141 | 88 | 52 | 45 | 11,5 |
| 125 | S02-C150 | 379 | 112 | 160 | 65 | 32 | 115 | 150 | 225 | 151 | 88 | 56 | 45 | 14,5 |
| 150 | S02-C150 | 421 | 134 | 180 | 65 | 32 | 115 | 150 | 245 | 151 | 88 | 56 | 45 | 17,1 |

LUG TYPE S64

GEARBOX OPERATED

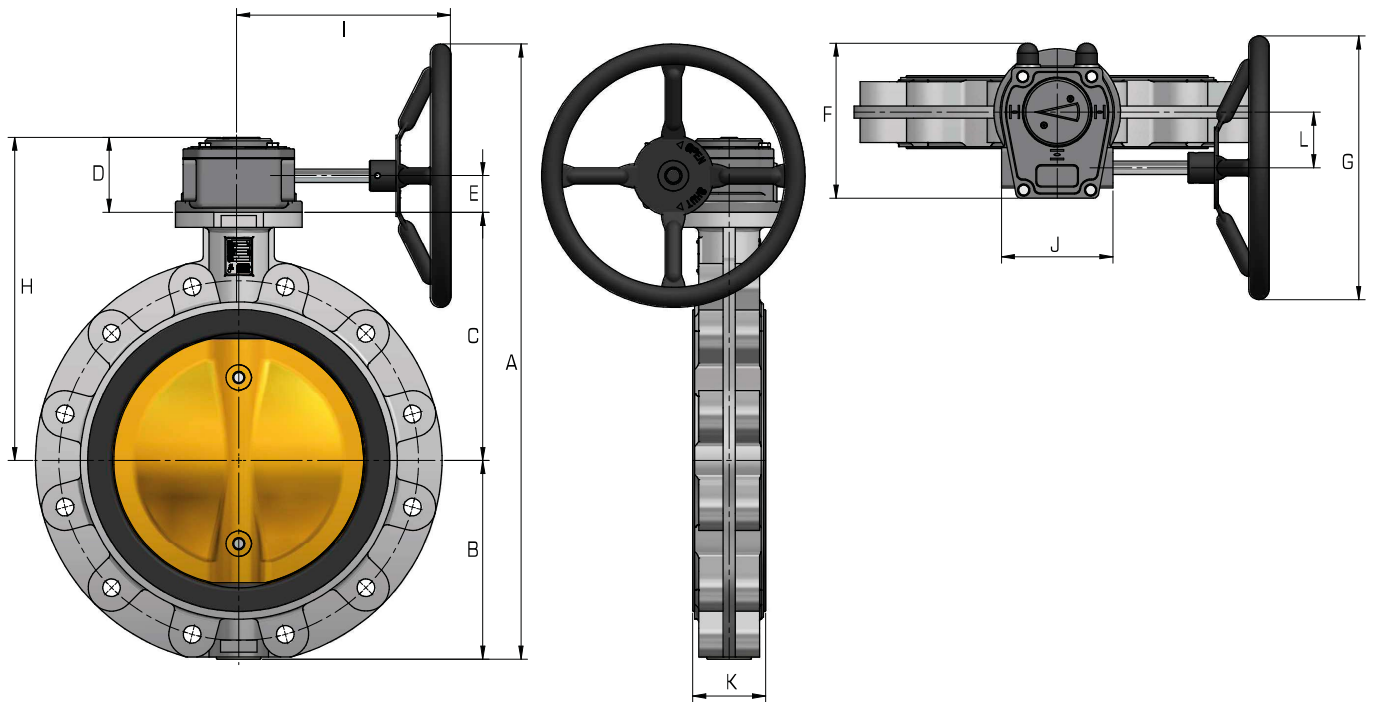

Standard available materials:

| Body | Disc | Shaft | Seat |
|------------|------------|-----------|----------|
| EN-JS1030 | BS1400 AB2 | SS 1.4122 | NBR |
| A216 WCB | EN-JS1030 | SS 431 | EPDM |
| SS 1.4408 | SS 1.4408 | SS 1.4462 | Viton |
| BS1400 AB2 | SD 2507 | SD F53 | Silicone |

Alfa Ductile iron Gearbox with casted "C" series handwheel or steel welded "V" series.


IP68 sealing and stroke adjustment -5° to 95°.

Temperature range between -25°C to 110 °C.

| DN | Gearbox | A | B | C | D | E | F | G | H | I | J | K | L | Weight ± kg |
|-----|----------|------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-------------|
| 200 | S02-C150 | 470 | 159 | 204 | 65 | 32 | 115 | 150 | 269 | 151 | 88 | 60 | 45 | 22,5 |
| 250 | S05-W250 | 601 | 195 | 245 | 74 | 36 | 148 | 250 | 319 | 200 | 110 | 68 | 55 | 36,3 |
| 300 | S05-W250 | 651 | 220 | 270 | 74 | 36 | 148 | 250 | 344 | 200 | 110 | 78 | 55 | 54 |
| 350 | S10-W300 | 795 | 282 | 315 | 96 | 48 | 200 | 300 | 411 | 273 | 148 | 78 | 71 | 75 |
| 400 | S10-W300 | 855 | 307 | 350 | 96 | 48 | 200 | 300 | 446 | 273 | 148 | 102 | 71 | 103 |
| 450 | S20-W500 | 978 | 352 | 375 | 104 | 51 | 241 | 400 | 479 | 271 | 110 | 114 | 86 | 133 |
| 500 | S20-W500 | 1053 | 387 | 415 | 104 | 51 | 241 | 400 | 519 | 271 | 110 | 127 | 86 | 193 |
| 600 | S35-W500 | 1318 | 452 | 565 | 104 | 51 | 241 | 400 | 669 | 290 | 110 | 154 | 86 | 279 |

LUG TYPE S64

GEARBOX OPERATED

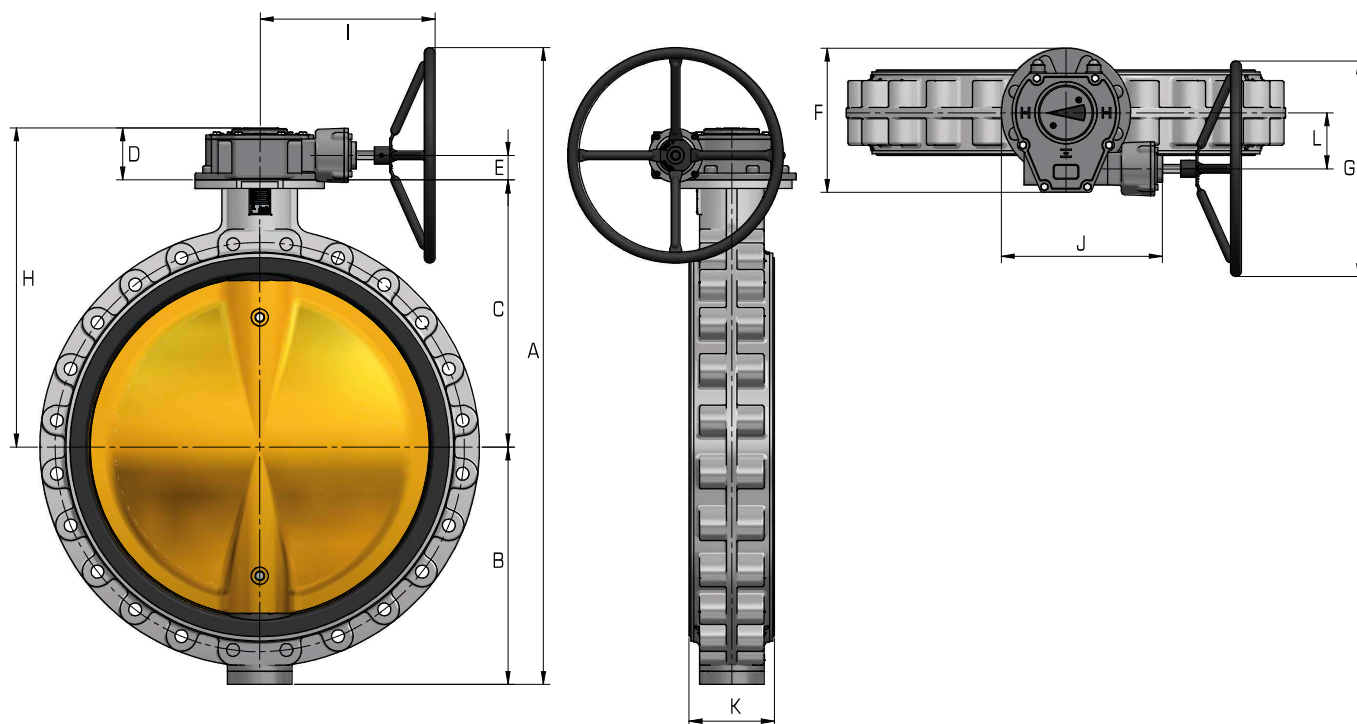

Standard available materials:

| Body | Disc | Shaft | Seat |
|------------|------------|-----------|----------|
| EN-JS1030 | BS1400 AB2 | SS 1.4122 | NBR |
| A216 WCB | EN-JS1030 | SS 431 | EPDM |
| SS 1.4408 | SS 1.4408 | SS 1.4462 | Viton |
| BS1400 AB2 | SD 2507 | SD F53 | Silicone |

Alfa Ductile iron Gearbox with casted "C" series handwheel or steel welded "W" series.

IP68 sealing and stroke adjustment -5° to 95°.

Temperature range between -25°C to 110 °C.

| DN | Gearbox | A | B | C | D | E | F | G | H | I | J | K | L | Weight ± kg |
|------|------------|------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-------------|
| 700 | S55/4-W500 | 1364 | 502 | 555 | 124 | 57 | 323 | 500 | 679 | 407 | 363 | 165 | 130 | 420 |
| 800 | S55/6-W500 | 1484 | 557 | 620 | 124 | 57 | 323 | 500 | 744 | 407 | 363 | 190 | 130 | 675 |
| 900 | S75/6-W500 | 1606 | 622 | 675 | 125 | 59 | 347 | 500 | 800 | 428 | 391 | 203 | 150 | 750 |
| 1000 | S75/6-W500 | 1721 | 672 | 740 | 125 | 59 | 347 | 500 | 865 | 428 | 391 | 216 | 150 | 1020 |