


# MONO TYPE S60

## ELECTRIC ACTUATOR

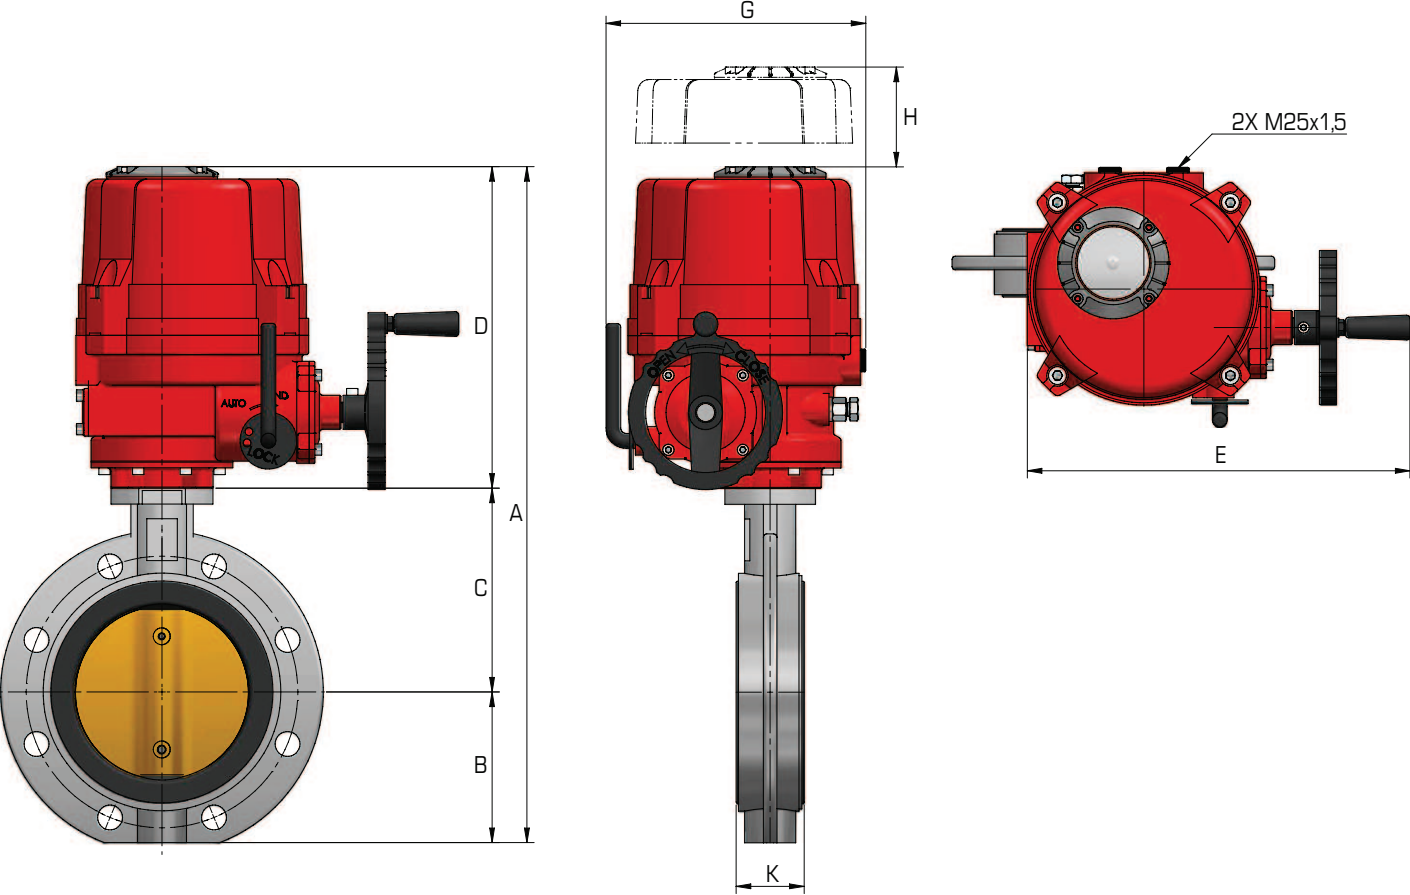

### Standard available materials:

Body	Disc	Shaft	Seat
EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	
BS1400 AB2	SD 2507	SD F53	


- Electric actuator, quarter turn, ITQ
- Enclosure standard Weatherproof IP67 or IP68
  - Power supply 24VDC, 110V, 220V or 380~440VAC
  - 4pcs open/close mech. limit switches
  - 2x torque switches
  - Build in thermal protection
  - Travel angle 90 degr.  $\pm 5^\circ$
  - Visual position indicator
  - Manual override handwheel

Many available options: modulation control, BUS communication, explosion proof, local control unit, etc.

DN	Type	A	B	C	D	E	G	H	K	Weight $\pm$ kg
40	ITQ160	458	61	113	284	338	229	140	33	17,7
50	ITQ160	469	67	118	284	338	229	140	43	18
65	ITQ160	484	74	126	284	338	229	140	46	19
80	ITQ160	499	82	133	284	338	229	140	46	19,2
100	ITQ160	531	100	147	284	338	229	140	52	21,1
125	ITQ160	556	112	160	284	338	229	140	56	23,3
150	ITQ160	598	134	180	284	338	229	140	56	25,3
200	ITQ240	647	159	204	284	338	229	140	60	30

# MONO TYPE S60

## ELECTRIC ACTUATOR

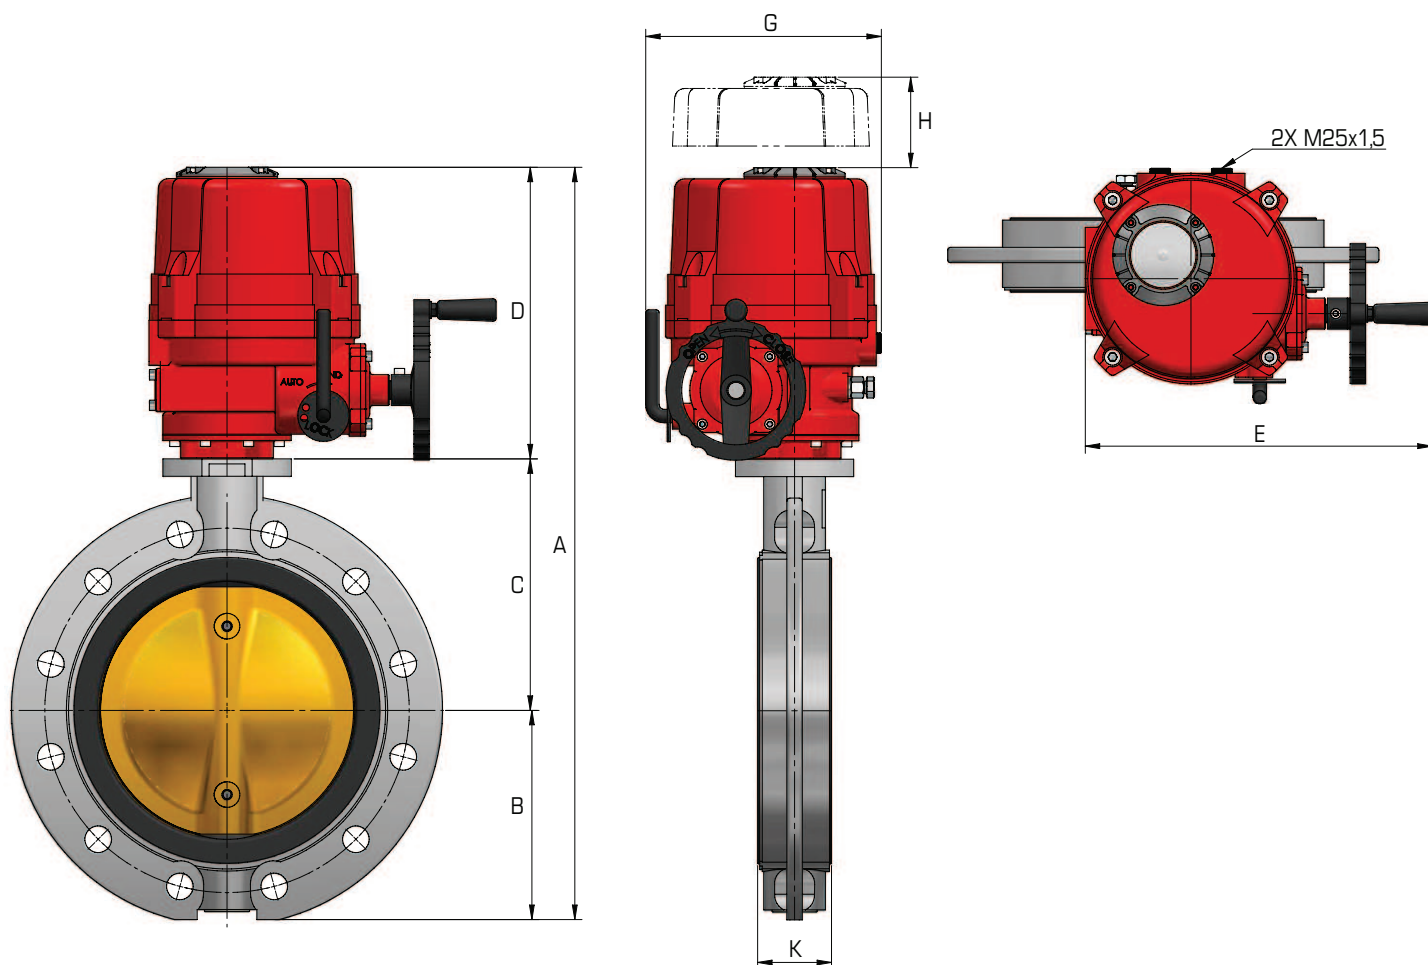

### Standard available materials:

Body	Disc	Shaft	Seat
EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	
BS1400 AB2	SD 2507	SD F53	

Electric actuator, quarter turn, ITQ

- Enclosure standard Weatherproof IP67 or IP68
- Power supply 24VDC, 110V, 220V or 380~440VAC
- 4pcs open/close mech. limit switches
- 2x torque switches
- Build in thermal protection
- Travel angle 90 degr.  $\pm 5^\circ$
- Visual position indicator
- Manual override handwheel

Many available options: modulation control, BUS communication, explosion proof, local control unit, etc.

DN	Type	A	B	C	D	E	G	H	K	Weight $\pm$ kg
250	ITQ350	753	195	245	313	357	244	170	68	45,8
300	ITQ500	803	220	270	313	357	244	170	78	53,6
350	ITQ500	910	282	315	313	357	244	170	78	74
400	ITQ800	995	307	350	338	380	287	195	102	94
450	ITQ1100	1065	352	375	338	380	287	195	114	130
500	ITQ2000	1187	387	415	385	440	375	225	127	192
600	ITQ2000	1402	452	565	385	440	375	225	154	247

Bigger sizes on request