


# DOUBLE FLANGED TYPE S46

## GEARBOX OPERATED

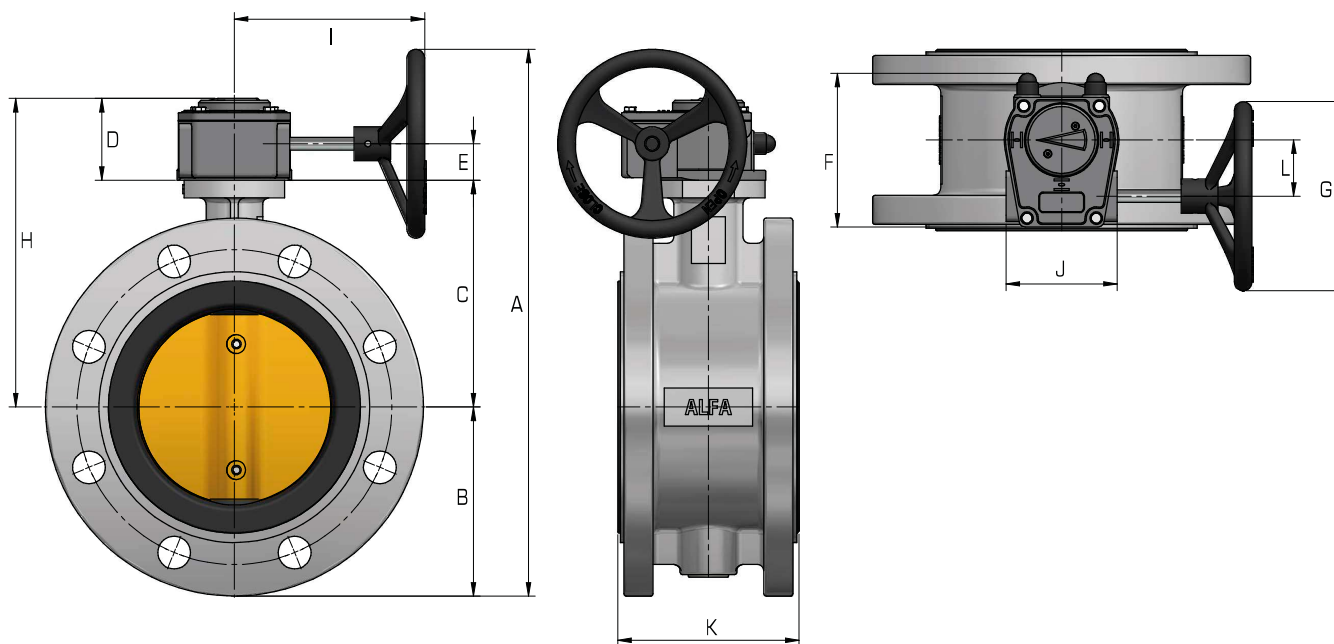

### Standard available materials:

Body	Disc	Shaft	Seat
EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	Viton
BS1400 AB2	SD 2507	SD F53	Silicone

Alfa Ductile iron Gearbox with casted "C" series handwheel or steel welded "V" series.


IP68 sealing and stroke adjustment -5° to 95°.

Temperature range between -25°C to 110 °C.

DN	Gearbox	A	B	C	D	E	F	G	H	I	J	K	L	Weight ± kg
40	S02-C100	256	61	113	65	32	115	100	178	141	88	106	45	10,2
50	S02-C100	267	67	118	65	32	115	100	183	141	88	108	45	11
65	S02-C100	282	74	126	65	32	115	100	191	141	88	112	45	11,8
80	S02-C100	297	82	133	65	32	115	100	198	141	88	114	45	13
100	S02-C100	329	100	147	65	32	115	100	212	141	88	127	45	16,1
125	S02-C150	379	112	160	65	32	115	150	225	151	88	140	45	22
150	S02-C150	421	134	180	65	32	115	150	245	151	88	140	45	27,1

# DOUBLE FLANGED TYPE S46

## GEARBOX OPERATED

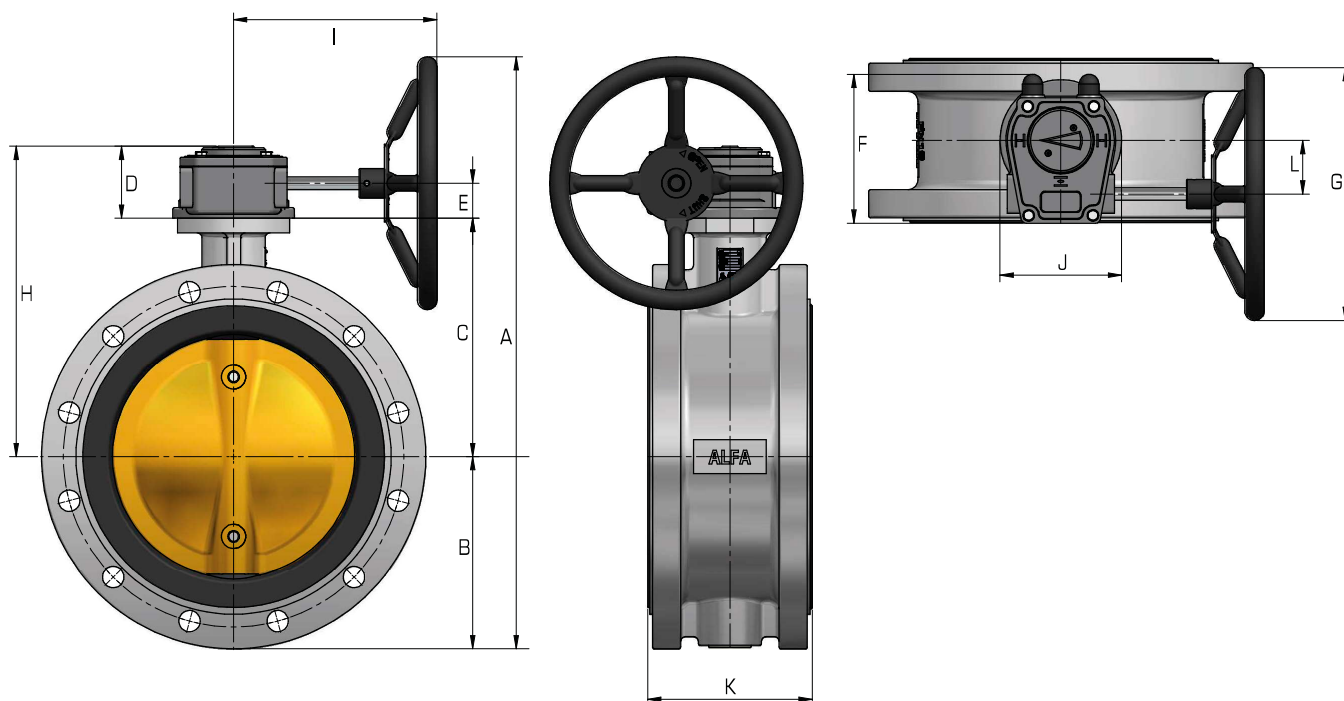

### Standard available materials:

Body	Disc	Shaft	Seat
EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	Viton
BS1400 AB2	SD 2507	SD F53	Silicone

Alfa Ductile iron Gearbox with casted "C" series handwheel or steel welded "V" series.


IP68 sealing and stroke adjustment -5° to 95°.

Temperature range between -25°C to 110 °C.

DN	Gearbox	A	B	C	D	E	F	G	H	I	J	K	L	Weight ± kg
200	S02-C150	470	159	204	65	32	115	150	269	151	88	152	45	47
250	S05-W250	601	195	245	74	36	148	250	319	200	110	165	55	58
300	S05-W250	651	220	270	74	36	148	250	344	200	110	178	55	83
350	S10-W300	795	282	315	96	48	200	300	411	273	148	190	71	107
400	S10-W300	855	307	350	96	48	200	300	446	273	148	216	71	113
450	S20-W500	978	352	375	104	51	241	400	479	271	110	222	86	174
500	S20-W500	1053	387	415	104	51	241	400	519	271	110	229	86	190
600	S35-W500	1318	452	565	104	51	241	400	669	290	110	267	86	251

# DOUBLE FLANGED TYPE S46

## GEARBOX OPERATED

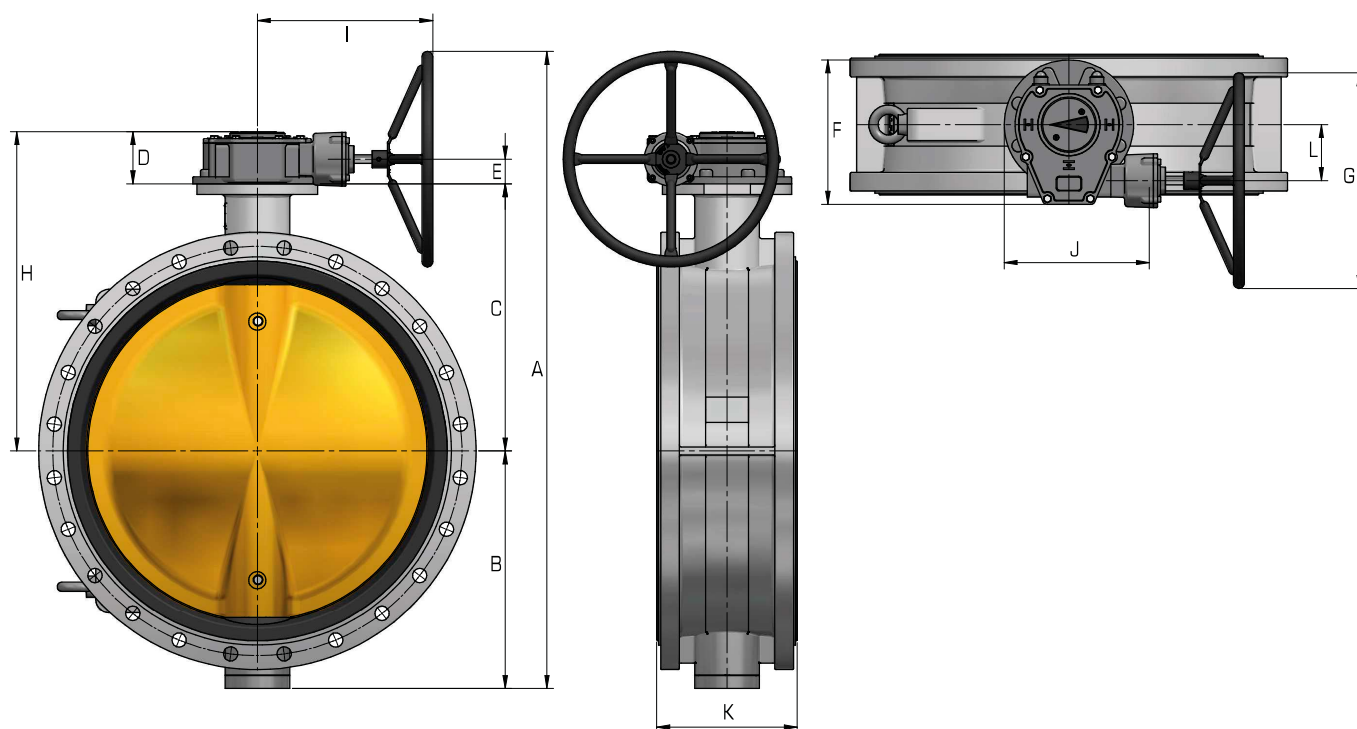

### Standard available materials:

Body	Disc	Shaft	Seat
------	------	-------	------

EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	Viton
BS1400 AB2	SD 2507	SD F53	Silicone

Alfa Ductile iron Gearbox with casted "C" series handwheel or steel welded "V" series.

IP68 sealing and stroke adjustment -5° to 95°.

Temperature range between -25°C to 110 °C.

DN	Gearbox	A	B	C	D	E	F	G	H	I	J	K	L	Weight ± kg
700	S55/4-W500	1364	502	555	124	57	323	500	679	407	363	292	130	410
800	S55/6-W500	1484	557	620	124	57	323	500	744	407	363	318	130	485
900	S75/6-W500	1606	622	675	125	59	347	500	800	428	391	330	150	721
1000	S75/6-W500	1721	672	740	125	59	347	500	865	428	391	410	150	1040