


Cast Iron Dual Plate Check Valve EPDM Seals WRAS Approved



Features

- Cast iron body
- 316 stainless steel disc
- EPDM seat
- To suit flanges PN16 and ANSI150
- Can be mounted in any position
- WRAS approved
- Working temperature: 0°C to +100°C
- Maximum working pressure: 16 bar

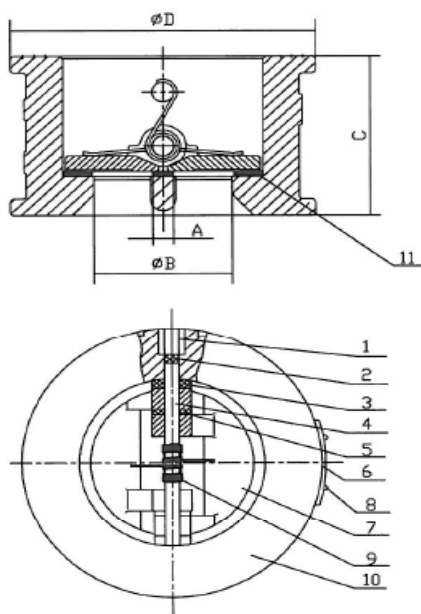

Item	Name	Material
1	Screw	Ductile Iron
2	Stem Washer	EPDM
3	Disc Ring	F4
4	Stem	SS 410
5	Washer	F4
6	Label	H62
7	Disc	SS 316
8	Plate Rivet	L3
9	Spring	SS
10	Body	Cast Iron
11	Seat	EPDM

Size	DN	A	$\varnothing B$	C	$\varnothing D$
------	----	---	-----------------	---	-----------------

2"	50	12	40	43	101
2.1/2"	65	14	58	46	121
3"	80	21.6	70	64	129
4"	100	21	88	64	156
5"	125	24.4	115	70	187
6"	150	25.7	134	76	213
8"	200	31	182	89	267
10"	250	36	220	114	327
12"	300	40.1	260	114	375