

Technical manual

Sylax butterfly valves - DN 200-350 mm

sylax[®]

Summary



• Sale leaflet	p.2
• Spare parts list	p.3
• Overall dimensions	p.4-5
• Top connections of the actuators	p.6
• Actuators	p.7
• Connecting flanges	p.8-9
• Normalisation	p.10
• Pressure	p.11
• Torque values - Pressure/Temperature diagram	p.12
• Flow rate (Kv)Δ	p.13
• Head loss chart (Δp)	p.14
• Type of flange	p.15
• Tag/Traceability	p.15
• Bolts and nuts	p.16-17
• Bolts and nuts	p.18
• Installation	p.19

Applications and main characteristics

Industrial processes and general services

Applications :

- Water distribution and supply with the main European approvals, water treatment, most of the fluids of general services.
- Industrial applications such as :
Metallurgical, mining, paper-making, shipbuilding, nuclear, environmental and mechanical, food industry (see our list of approvals).
- For special applications, especially for particularly difficult media, contact our technical back office team.

Main characteristics :

- Multiple connections : centering lugs, tapped lugs, central and double flange.
- Vertical and horizontal operating position.
- High power transmission with robust grooved connection between the shaft and the disc.
- Easy maintenance by removing the circlips
- Interchangeable disc and liner.
- Body in cast iron GJL1040, ductile iron GJS1030, steel and stainless steel.
- Body epoxy coated 80μm colour blue RAL 5017 (a lot of other coatings on option, please ask our sales department)
- Wide choice of actuators.


An **mounting instruction** specifying the installation characteristics and the commission of the Sylax 200-350 mm is added to every product when the ATEX version is specified; It is available on our web site www.socla.com or on request by our sales department.

Sale leaflet



By concentrating the technologies and by integrating technical solutions of the highest levels, **Socla** fulfils its ambition :

- competitiveness of a standard range,
- reliability,
- comprehensive range thanks to a multiplicity of solutions.

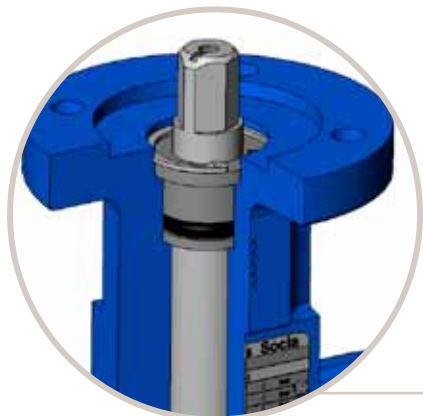

- Safety anti-ejection circlip keeps shaft in place and allows easy maintenance
- Safety reinforced by a secondary water-tightness.
- Spline driven one piece shaft connected to floating disc :

. high reliability of tightness and torque transmission in the long term.




- High power transmission with robust grooved connection between the shaft and the disc.
- Complete protection of the shaft and valve body from fluids.
- Reliability of movements with self-lubricating bearings.



- Identification and traceability ensured by riveted metal tag : see on page 15.

Spare parts list




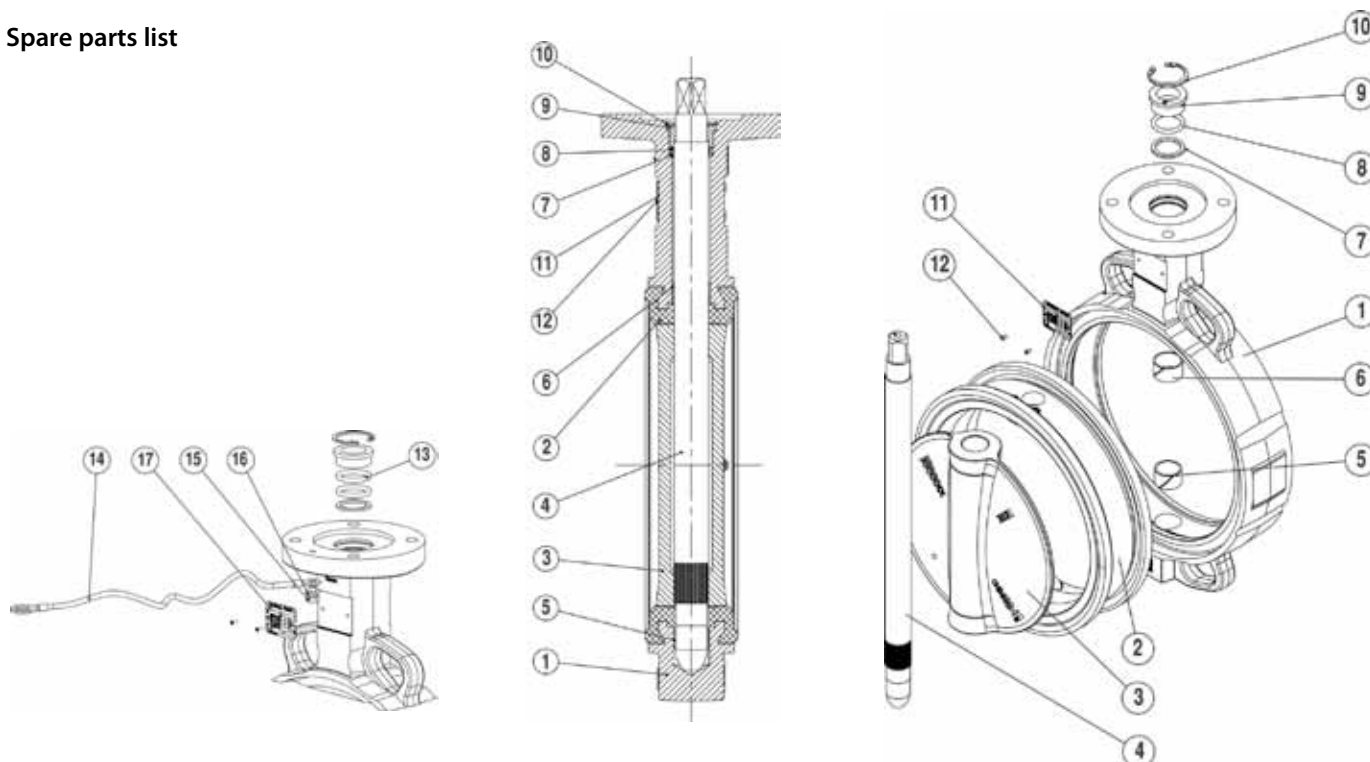


Nb	DESCRIPTION	Qty	MATERIALS ACCORDING TO NORMS			
			Materials	EN	ASTM	JIS
1	Body	1	Ductile iron	EN GJS 400-15 (JS 1030)	-	FCD40
			Cast iron	EN GJL 250 (JL 1040)	-	FC25
			Steel	GE 280 (E280 - 480M)	gr WCB	-
			Stainless steel	GX5 CrNiMo 19-11-2 (1.4408)	316	SUS 316
2	Liner	1	EPDM	-	-	-
			White EPDM	-	-	-
			High content nitrile	-	-	-
			White nitrile	-	-	-
			Carboxylated nitrile	-	-	-
			CSM (Polyethylen chloro-sulfonated)	-	-	-
			Silicone	-	-	-
			FKM	-	-	-
			Buthyl	-	-	-
			Natural rubber	-	-	-
3	Disc	1	Ductile iron	EN GJS 400-15 (JS 1030)	-	FCD40
			Stainless steel	GX5 CrNiMo 19-11-2 (1.4408)	316	SUS 316
			Stainless steel	X2 CrNiMo 17-12-2 (1.4404)	316L	SUS 316L
			Alu-bronze	CuAl10Fe5Ni5 (CC333G)	-	-
			Alu-bronze Annealing with protective gas/Epoxy	CuAl10Fe5Ni5 (CC333G)	-	-
4	Stem	1	Stainless steel	X5 CrNiCuNb 16-4 (1.4542)	630	SUS 630
			Stainless steel	X2 CrNiMo 17-12-2 (1.4404)	316L	SUS 316L
			Stainless steel	X30 Cr13 (1.4028)	420	SUS 420 J2
5 - 6	Anti-friction bearing	1	Zinc coated steel + PTFE	-	-	-
7	Anti-extrusion bush	1	Stainless steel	X5 CrNi 18-10 (1.4301)	304	SUS 304
			Plastic	IXEF 50 FV	-	-
8	O-ring	1	Nitrile/FKM	-	-	-
9	Sealing washer	1	Plastic	IXEF 50 FV	-	-
			Stainless steel	X5 CrNi 18-10 (1.4301)	304	SUS 304
			Brass	CuZn39Pb2 (CW612N)	-	-
10	Circlips	1	Stainless steel	X30 Cr13 (1.4028)	420	SUS 420 J2
			Steel	XC 75	-	-
11	Identification plate	1	Aluminium	EN AW - AL995 (EN AW - 1050A)	-	-
12	Rivet	2	Alu / Stainless steel	-	-	-

ATEX special spare parts list

13	Braid	1	Tinned copper	-	-	-
14	Discharge electro-static braid	1	Tinned copper	-	-	-
15	Screw	1	Stainless steel	A2 - 70	304	SUS 304
16	Stop washer	1	Stainless steel	X5 CrNi 18-10 (1.4301)	304	SUS 304
17	ATEX identification plate	1	Aluminium	EN AW - AL995 (EN AW - 1050A)	-	-

Overall dimensions

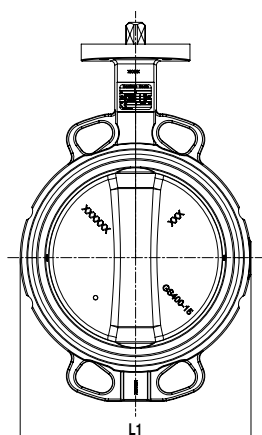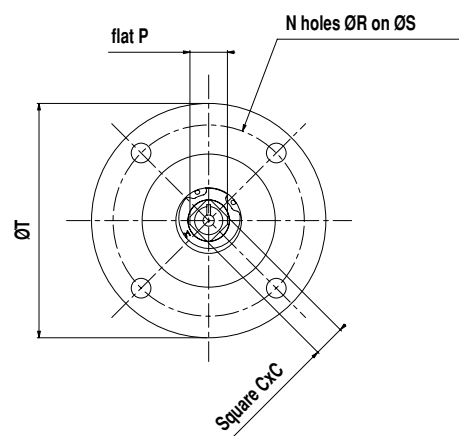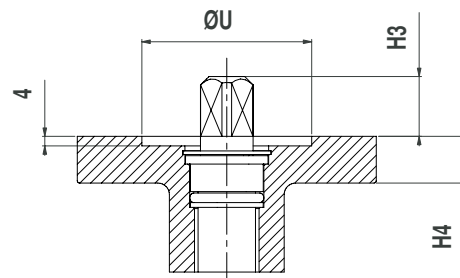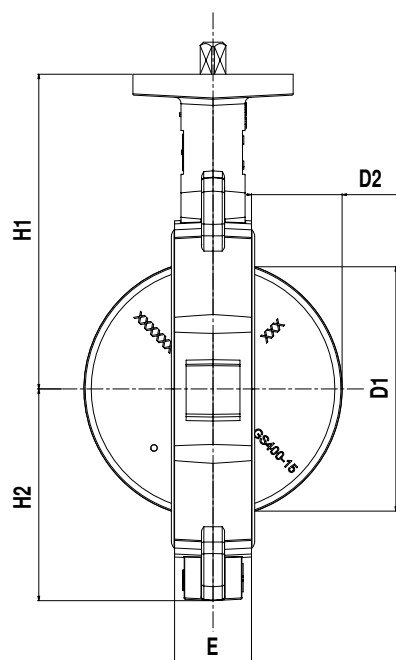


• 4 Centring lugs

Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square drive outlet			Travel of The disc		Weight (kg)	
DN	NPS	E	L1	H1	H2	H4	N	øR	øS	øT	øU	N°	□C	H3	Plat P	D1	D2	(1)	(2)
200	8	60	265	245,5	164	15,5	4	10,5	102	125	71	F10	17	24	20	192	71	15,4	13,7
250	10	68	317	271	200	16	4	10,5	102	125	71	F10	22	24	26	242	91,5	19	20,1
300	12	78	370	296	235	16	4	12,5	125	150	87	F12	22	29	26	291	112	30,2	29,2
350	14	78	424	305	270	16	4	12,5	125	150	87	F12	27	29	-	331	132	35,9	36,2

(1) Ductile iron body (JS1030), ductile iron disc (JS1030), EPDM liner.

(2) Cast iron body (JL1040), ductile iron disc (JS1030), EPDM liner.

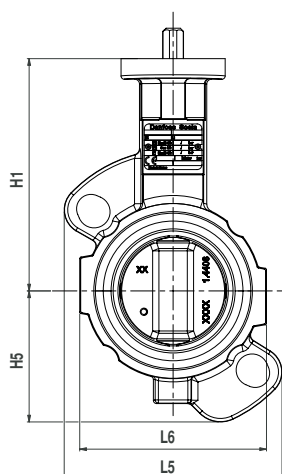


• 2 Centring lugs

Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211							Square drive outlet			Travel of The disc		Weight (kg)	
DN	NPS	E	L5	L6	H1	H5	H4	N	øR	øS	øT	øU	N°	□C	H3	Plat P	D1	D2	(1)	(2)
200	8	60	164	279	245,5	174	15,5	4	10,5	102	125	71	F10	17	24	20	192	71	13,5	12,1
250	10	68	187	332	271	210	16	4	10,5	102	125	71	F10	22	24	26	242	91,5	20,5	18,1
300	12	78	166	382	296	239	16	4	12,5	125	150	87	F12	22	29	26	291	112	29,2	26
350	14	78	185	435	305	267	16	4	12,5	125	150	87	F12	27	29	-	331	132	37,5	-

(1) Stainless steel body (1.4408), stainless steel disc (1.4408), EPDM liner.

(2) Steel body (WCB), stainless steel disc (1.4408), EPDM liner.

Overall dimensions

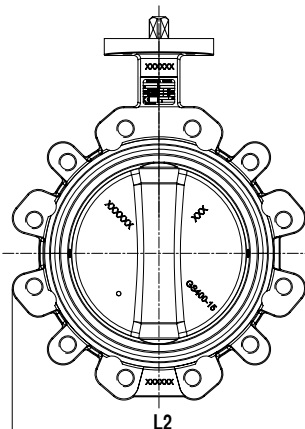


Tapped lugs

Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight (kg)	
DN	NPS	E	L1	H1	H2	H4	N	ØR	ØS	ØT	ØU	N°	□C	H3	Plat P	D1	D2	(1)	(2)
200	8	60	336	245,5	168	15,5	4	10,5	102	125	71	F10	17	24	20	192	71	15,4	21,6
250	10	68	396	271	198	16	4	10,5	102	125	71	F10	22	24	26	242	91,5	19	28,1
300	12	78	462	296	227	16	4	12,5	125	150	87	F12	22	29	26	291	112	30,2	38,2
350	14	78	497	305	248	16	4	12,5	125	150	87	F12	27	29	-	331	132	46	-

(1) Ductile iron body (JS1030), ductile iron disc (JS1030), EPDM liner.
(2) Stainless steel body (1.4408), stainless steel disc (1.4408), EPDM liner.


• Double flange

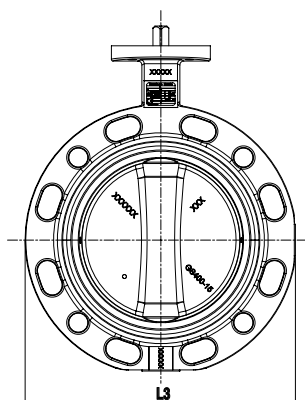

Diameter		Face to face	Encombres				Embase suivant ISO 5211						Sortie axe carré			Débattement obturateur		Poids Kg
DN	NPS	E	L3	H1	H2	H4	N	ØR	ØS	ØT	ØU	N°	□C	H3	plat P	D1	D2	(1)
200	8	60	343,5	245,5	164	15,5	4	10,5	102	125	71	F10	17	24	20	192	71	18
250	10	68	406	271	200	16	4	10,5	102	125	71	F10	22	24	26	242	91,5	28
300	12	78	482,5	296	235	16	4	12,5	125	150	87	F12	22	29	26	291	112	44,4
350	14	78	533	305	270	16	4	12,5	125	150	87	F12	27	29	-	331	132	57,5

(1) Ductile iron body (JS1030), ductile iron disc (JS1030), EPDM liner.

• Central flange

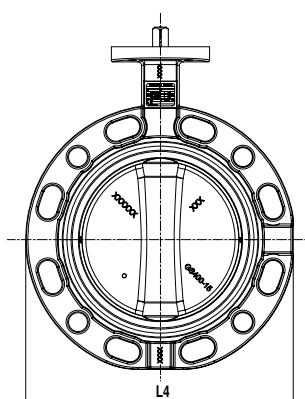


Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight Kg
DN	NPS	E	L4	H1	H2	H4	N	ØR	ØS	ØT	ØU	N°	□C	H3	plat P	D1	D2	(1)
200	8	60	340,5	245,5	165	15,5	4	10,5	102	125	71	F10	17	24	20	192	71	16,3

(1) Ductile iron body (JS1030), ductile iron disc (JS1030), EPDM liner.

Technical manual Sylax 200-350 mm

Connecting kit for actuations

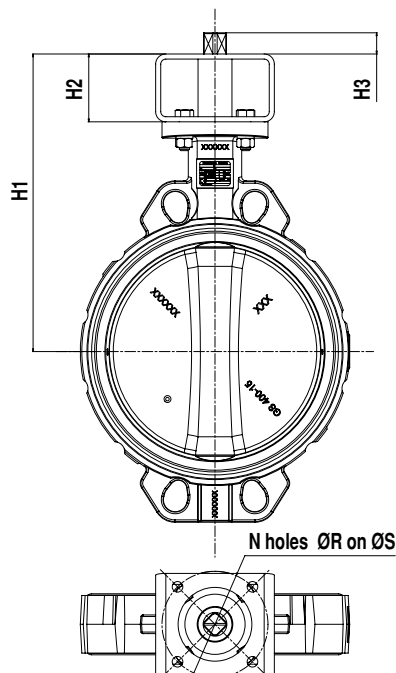

We recommend direct mounting of the actuation, otherwise see table below.

DN	NPS	Iso top of the valve	Iso top of the actuation															
			F03		F04		F05		F07		F10		F12		F14		F16	
			H1	H2	H1	H2	H1	H2	H1	H2	H1	H2	H1	H2	H1	H2	H1	H2
200	8	F10/□17					324,5	80	324,5	80	324,5	80	324,5	80	334,5		334,5	
250	10	F10/□22					350		350	80	350	80	350	80	360		360	
300	12	F12/□22							375		385		385		385	90	385	90
350	14	F12/□27									395	90	395	90	395		395	

DN	NPS	Iso top of the valve	Exceeding length of the shaft H3									
			Kit	□9	□11	□14	□17	□22	□27	□36	□46	
200	8	F10/□17	F05									
			F07									
			F10		9	12	15	20	25	34		
			F12									
			F14									
250	10	F10/□22	F05									
			F07									
			F10			12	15	20	25	34		
			F12									
			F14									
300	12	F12/□22	F07									
			F10									
			F12			12	15	20	25	34	44	
			F14									
			F16									
350	14	F12/□27	F07									
			F10									
			F12				15	20	25	34	48	
			F14									
			F16									

N°	N	øR	øS
F04	4	5,5	42
F05	4	6,5	50
F07	4	8,5	70
F10	4	10,5	102
F12	4	12,5	125
F14	4	17	140
F16	4	22	165


Reminder of the iso top dimensions EN ISO 5211 (see also the overall dimensions).

Other special executions on request :
actuated by par square drive and
flat according to EN ISO 5211 ,
subjected to technical feasibility.

Actuations

Find below the different standard assembly combinations.

For any other information, please ask our technical Department.

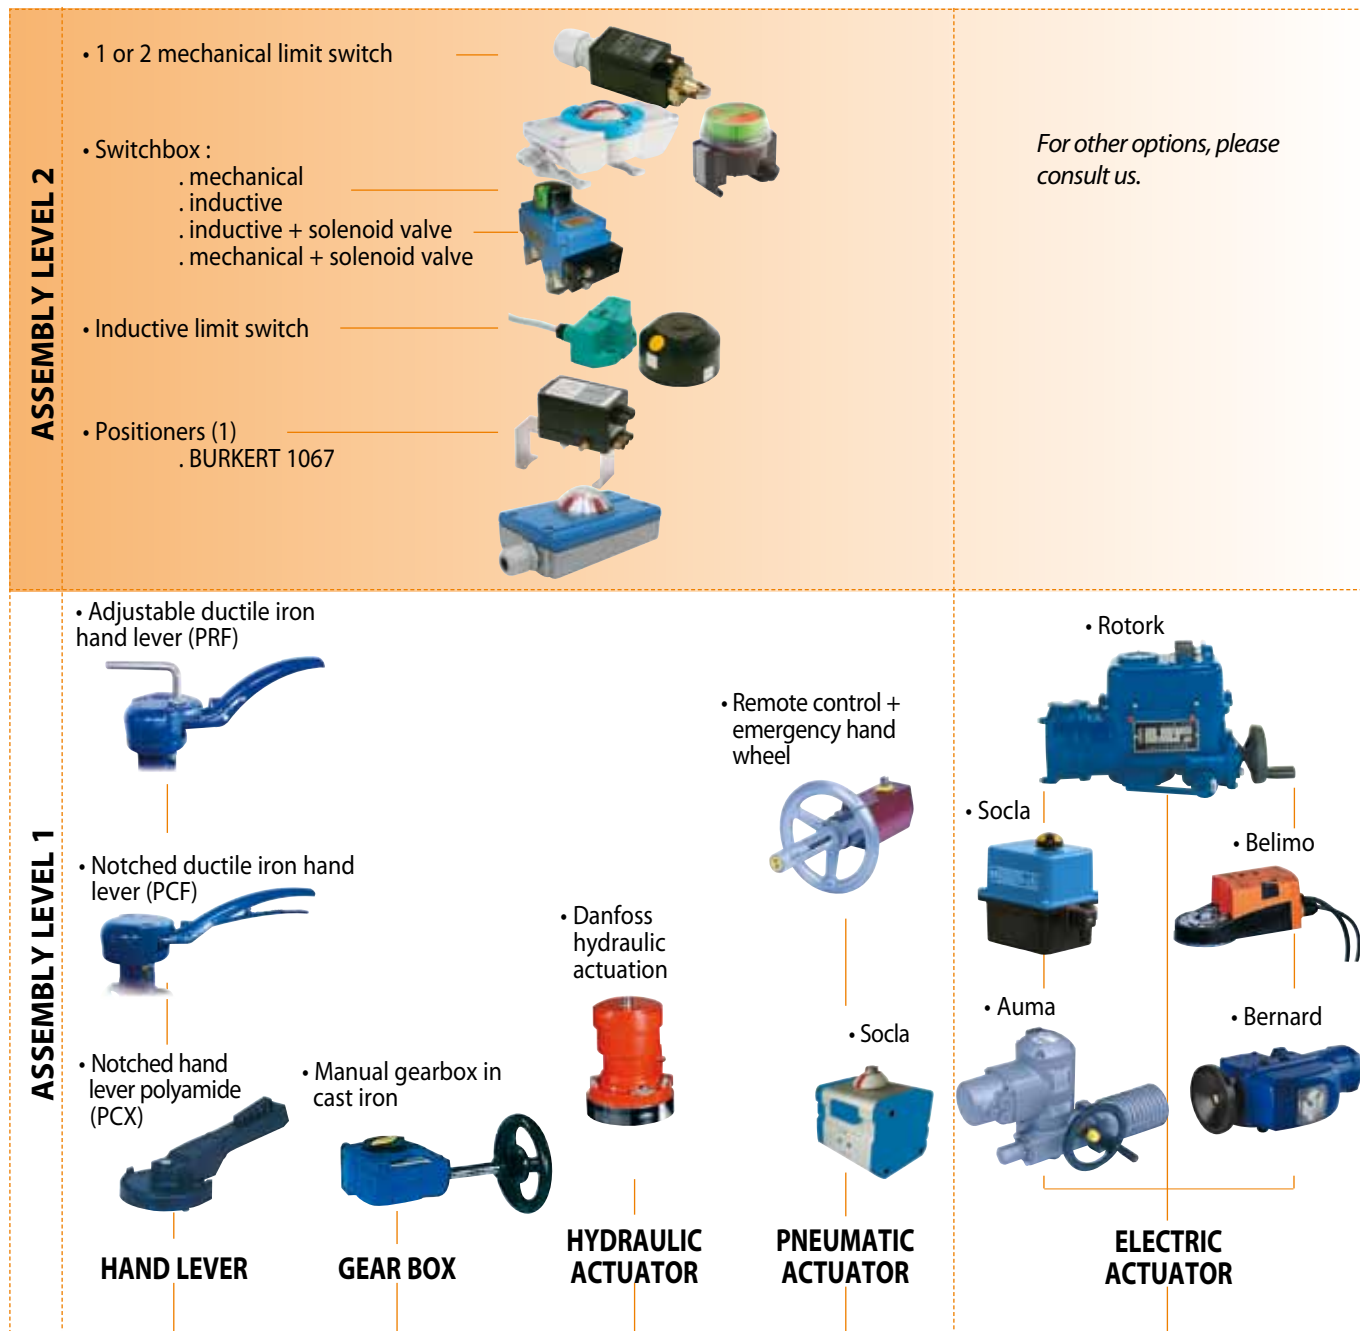

(1) Pneumatic actuator only

Connecting flanges

The Sylax 200-350 mm butterfly valve can be mounted with the following connections (other types on request) :

- ✓ : possible mounting
- : possible mounting with re-machining
- : possible mounting but special reference
- : impossible mounting

• 4 Centering lugs

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
200	8	✓	✓	✓	●	●	✓	✓	●	✓	✓	●	●	●
250	10	✓	✓	✓	●	●	✓	✓	■	✓	✓	✓	✓	●
300	12	✓	✓	✓	●	●	✓	✓	■	✓	✓	●	●	●
350	14	✓	✓	✓	✓	●	✓	✓	■	✓	✓	●	●	●

• 2 Centering lugs ⁽³⁾

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
200	8	○	✓	✓	○	○	✓	○	○	✓	✓	○	○	○
250	10	○	✓	✓	○	○	✓	○	■	○	✓	○	✓	○
300	12	○	✓	✓	○	○	✓	○	■	✓	○	○	○	○
350 ⁽⁴⁾	14	○	✓	✓	○	○	○	○	■	✓	✓	○	○	○

(3) Body in stainless steel (1.4408) and in steel (WCB)

(4) Stainless steel version only

• Tapped lugs

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
200	8	✓	✓	✓	✓	■	✓	✓	✓	✓	✓	✓	✓	✓
250	10	✓	✓	✓	✓	✓	✓	✓	✓	■	✓	✓	✓	✓
300	12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
350	14	■	✓	✓	■	■	■	■	■	■	■	■	■	■

Attention : the Sylax 200-350 mm lug type body is not a multi-connection body (connection to many flanges of different sizes). Generally, every connection relates to a different reference of finished products.

Connecting flanges

• Double flange

- ✓ : possible mounting
- : possible mounting with re-machining
- : possible mounting but special reference
- : impossible mounting

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
200	8	■	✓	✓	●	■	✓	✓	■	✓	●	■	●	■
250	10	■	✓	✓	■	■	✓	✓	■	●	●	■	✓	■
300	12	■	✓	✓	■	■	✓	✓	■	✓	✓	■	■	■
350	14	■	✓	✓	■	■	●	●	■	●	●	■	■	■


• Central flange

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
200	8	●	✓	✓	■	■	✓	✓	■	✓	●	●	●	■

• End of line mounting and downstream removing

The end of line mounting and the downstream removing, at ambient temperature, of the Sylax 200-350 mm butterfly valve is limited to the pressure mentioned on page 11 according to the PED directive 97/23/CE.

These mountings are only possible on tapped lugs, double flanges and central flange bodies

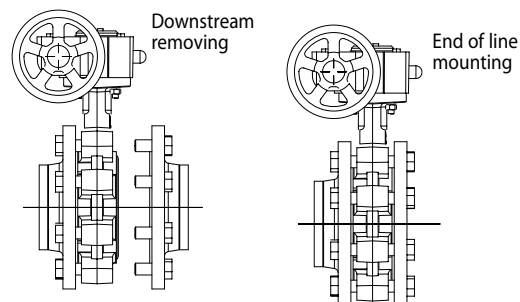

For wafer type bodies with 4 centering lugs, the end of line mounting can be done in the following conditions :

- ambient temperature
- For water or non dangerous liquids (L2)
- For butterfly valves PFA 16 bar between flanges
- For butterfly valves with ductile iron body
- For butterfly valves with liners in EPDM or high content nitrile
- Within a short period (such as maintenance, ...), 15 days maximum
- In pressure conditions (PFA or PS) such as : see table

DN	PFA or PS (bar)
200 to 300	8

Use nuts with reduced face-to-face dimensions between the flange to be dismantled and the centering lugs.


Use washers, wide ones if needed, in order to mount the nuts on the lugs.

The mounting and the removing must be done successively and in opposite way on each nut.

For the mounting, apply a reasonable torque on the nuts, in order not to damage the lugs, until metal-metal contact between flange and body.

For flanges with 8 rods, only 4 are used to maintain the valve in downstream removing ; the 8 rods must be re-mounted for a normal use between flanges .

In case of unexpected downstream removing, integrate and screw successively and in opposite way, between the lugs and the flange to be removed, the 4 nuts which hold the butterfly valve.

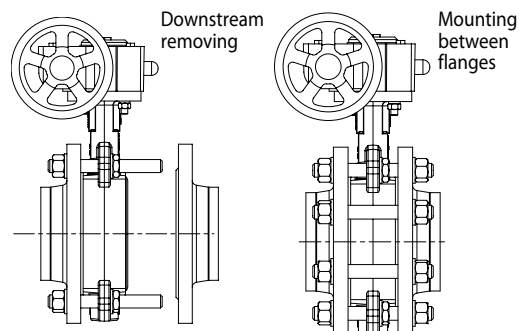

Technical manual

Sylax 200-350 mm

Normalisation

- **Design :**
According to EN 593 and marking according to EN 19
- **Iso top connection for actuations :**
According to EN ISO 5211
- **Face to face :**
According to 558-1 series 20
ISO 5752 series 20
API 609 table 2
- **Connecting flanges :** see on page 8
According to EN1092-1 and EN1092-2
ASME/ANSI B16.5
BS10-d and BS10-e
JIS B2238 and JIS B2239
- **Tests :**
According to EN12266-1
Resistance and tightness of the body : test P11(1,5 x allowable operating pressure)
Tightness of the seat : test P12 rate A (1,1 x allowable operating pressure)

According to EN12266-2
Anti-static design : test F21

• European Directives :

Our butterfly valves are in accordance to the safety requirements of the following directives. :

Directive 97/23/CE : Equipments under pressure PED (Pressure Equipment Directive)
Applies to the design, manufacturing and the assessment of the conformity of pressure equipment, the maximum allowable pressure of which is 0,5 bar.

Pressure equipment for water supply, distribution, and disposal of water is excluded.

Depending on the type of pressure equipment, maximum allowable temperature (PS), DN, physical nature of the fluid (liquid, gas or vapour) and the degree of danger of the fluid (group1/2)*, the directive classifies this same equipment into different categories (article 3.3, I, II, III, IV), required for the assessment of conformity with CE marking.

The equipment defined in article 3.3 of the directive must not bear the CE marking.

(*) Group 1 : hazardous fluids (directive 67/548/EEC) / explosive / highly flammable / easily flammable / flammable / very toxic / toxic / combustion agents.

Group 2 : all other fluids

Important notice : the indicated pressure for the different categories of fluids (L1/L2/G1/G2) is under no condition a guarantee of use.

Therefore, it is essential to validate the use of products under given operating conditions. Socla is not responsible for alteration of the products to working conditions not previously specified by the customer.

In addition, the operating instructions are available on our web site www.socla.com or by simple request from our sales department.

Directive 94/9/CE : ATEX (EXplosive ATmospheres) - OPTIONAL FOR SYLAX 200-350

This directive is only applicable for the following atmospheric conditions : $-20^{\circ}\text{C} < T < +60^{\circ}\text{C}$; $0,8 \text{ bar} \leq P \leq 1,2 \text{ bar}$.

In this risk analysis, the fluid which passes through the valve is not taken into account. It is under the responsibility of the user to take into consideration the risks generated by the fluid like : heating of the surface of the valve, internal chocks generated by granulates, wave of chocks due to the installation (water hammering), or the risks due to foreign bodies which are inside the installation.

Classification of the bare shaft valve :

The marking of the bare shaft valve is :  II 2 DG.

Classification of the set valve + actuation :

- Valve with a hand lever :

The use of hand levers produced by Socla within an ATEX area do not represent additional risks. The valve with a hand lever is in conformity to the marking :  II 2 DG.

- Valve with other actuations :

The classification of the valve + actuation supplied by Socla is similar to the lowest classification of the components which composed the assembly.

No additional marking will be used to indicate the classification of the assembly.

If only one component of the assemblyset is not market with ATEX label, therefore the complete assemblyset is not conformed to ATEX directive.

The classification of the equipment allows its use in a determinate area; an use in another area is under the responsibility of the user.

Machinery Directive 2006/42/CE : Machinery Directive

In its Appendix I it sets a certain number of Essential Health and Safety Requirements which must be met. It applies to motorised butterfly valves, (with electric, pneumatic or hydraulic actuators). According to this Directive, these sets are "Partly Completed Machineries" designed for being integrated into a machine.

"Partly Completed Machinery" means an assembly which is almost machinery but which cannot in itself perform a specific application. A drive system is partly completed machinery. Partly completed machinery is only intended to be incorporated into or assembled with other machinery or other partly completed machinery or equipment, thereby forming machinery to which this Directive applies.

An instruction notice specifying the installation characteristics and the commission of the Sylax 200-350 mm is added to every product when the ATEX version is specified; It is available on our web site www.socla.com or on request by our sales department.

Pressure

DIRECTIVE 97/23/CE Equipments under pressure.

Products manufactured in conformity with the requirements of the directive, according to pressure, DN and fluid (see on the precedent page).

LINERS		DN mm	Cat.	MOUNTING	PFA	PS			
						L1	L2	G1	G2
6 bar	EPDM, Nitrile (CC333G disc), White EPDM	32 to 150	3,3	Flanges	6	6	6		6
				End of line	4	4	4		4
		200 to 350	I	Flanges	6	6	6		6
				End of line	4	4	4		4
	Nitrile (except CC333G disc), Neoprene, Butyl, Hypalon, Natural rubber, White natural rubber.	32 to 100	I	Flanges	6	6	6	6	6
				End of line	4	4	4		4
		125 to 350	II	Flanges	6	6	6	6	6
				End of line	4	4	4		4
10 bar	EPDM, Nitrile (CC333G disc), White Nitrile, Carboxylated Nitrile, White EPDM	25 to 100	3,3	Flanges	10	10	10		10
				End of line	6	6	6		6
		125 & 150	I	Flanges	10	10	10		10
				End of line	6	6	6		6
		200 to 350	I	Flanges	10	10	10		10
				End of line	6	6	6		6
	Nitrile (except CC333G disc), FKM	25	3,3	Flanges	10	10	10	10	10
				End of line	6	6	6		6
		32 to 100	I	Flanges	10	10	10	10	10
				End of line	6	6	6		6
		125 to 350	II	Flanges	10	10	10	10	10
				End of line	6	6	6		6
	Silicone	32 to 100	I	Flanges	10	10	10	10	10
				End of line	6	6	6		6
		125 to 150	II	Flanges	10	10	10	10	10
				End of line	6	6	6		6
		200 to 350	II	Flanges	6	6	6	6	6
				End of line	4	4	4		4
16 bar	EPDM, Nitrile (CC333G disc)	32 to 100	3,3	Flanges	16	16	16		10
				End of line	12	12	12		10
		125	I	Flanges	16	16	16		10
				End of line	12	12	12		10
		150	I	Flanges	16	10	16		10
				End of line	12	6	12		10
		200 to 300	I	Flanges	16	10	16		10
				End of line	10	6	10		10
		350	I	Flanges	16	10	16		10
				End of line	8	6	8		8
	Nitrile (except CC333G disc), Neoprene, Butyl, Hypalon, Natural rubber, White natural rubber	32 to 100	I	Flanges	16	16	16	10	16
				End of line	12	12	12		12
		125 & 150	II	Flanges	16	16	16	10	16
				End of line	12	12	12		12
		200 to 300	II	Flanges	16	16	16	10	10
				End of line	10	10	10		10
		350	II	Flanges	16	16	16	10	10
				End of line	8	8	8		8
20 bar	EPDM, Nitrile (CC333G disc)	32 to 250	3,3	Flanges	20		20		
				End of line	12		12		
		300 & 350	I	Flanges	20		20		
				End of line	12		12		
	Nitrile (except CC333G disc), Neoprene, Butyl, Natural rubber, White natural rubber	32 to 100	3,3	Flanges	20	20	20		
				End of line	12	12	12		
25 bar	EPDM, Nitrile (CC333G disc)	32 to 150	3,3	Flanges	25		25		
				End of line	16		16		
	Nitrile (except CC333G disc)	32 to 80	3,3	Flanges	25	25	25		
				End of line	16	16	16		
		100 to 150	II	Flanges	25	25	25		
				End of line	16	16	16		

NOTE : Butterfly valves of category II used as «end of line», please consult us.

ATTENTION

Gas G1 and G2 : The max. pressure is 6 bar when using cast iron 5.1301(EN-GJL-250).

PS : Maximum allowable pressure (in bar) according to Directive 97/23/CE

PFA : Allowable operating pressure (in bar) for supply, distribution and disposal of water.

Torque values


Wet torques(Nm)		200	250	300	350
PS6	EPDM	100	200	280	400
	NBR	150	255	380	560
PS16	EPDM	180	280	430	500
	NBR	220	340	500	720
PS20		350	560	850	1250
PS25					

NOTE :

Torques for liner in EPDM and High Content Nitrile (except DN250 to 350 for PS20).
One actuation minimum per month.

Pressure/temperature diagram

EPDM liner DN 200 up to 350 mm

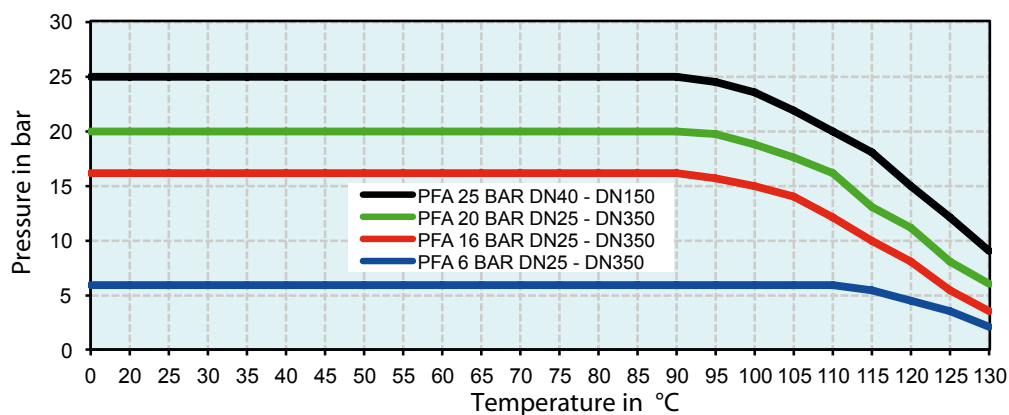

For every other elastomer, please ask our sales department.

Flow rate (Kv)

OPENING STAGE - Stainless steel disc

DN	10°	20°	30°	40°	50°	60°	70°	80°	90°
200	15	76	200	399	680	1099	1666	2196	2500
250	40	150	333	621	1084	1765	2652	3517	3948
300	60	219	500	989	1736	2770	4097	5118	5635
350	145	420	882	1676	2850	4462	6000	7431	8520


The butterfly valve is not the best product for regulating. Nevertheless, the Sylax 200-350 mm butterfly valve can be used to regulate by an opening stage between 30° and 90°.

A regulation in the opening stage lower than 30° is not advisable because of over speed, cavitation effect, which could damage prematurely the valve.


K_v = volume of water in m³/h through a valve at a preset opening stage and under a head loss of 1 bar.

The maximum flow velocity of the fluid through the valve must not exceed :

- 3 m/s for liquid fluids. Between 3 and 5m/s, the use of the Sylax 200-350 mm butterfly valve is possible, but the phenomena of cavitation, noise, vibration and water hammering increase.
- 20m/s for gas. Between 20 and 25m/s, the use of the Sylax 200-350 mm butterfly valve is possible, but the phenomena of cavitation, noise, vibration and water hammering increase.
- for pulverulent or paste fluids : please consult us.

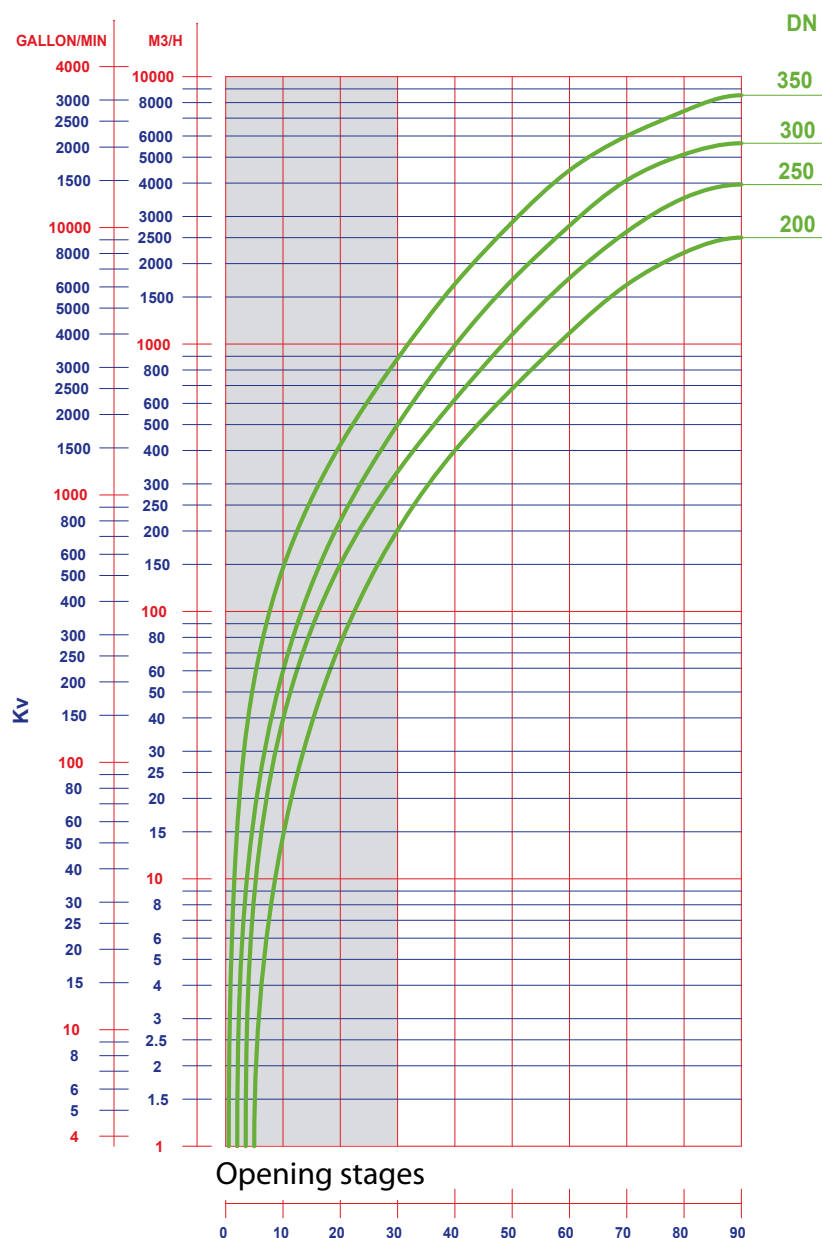


Head loss diagram (Δp)

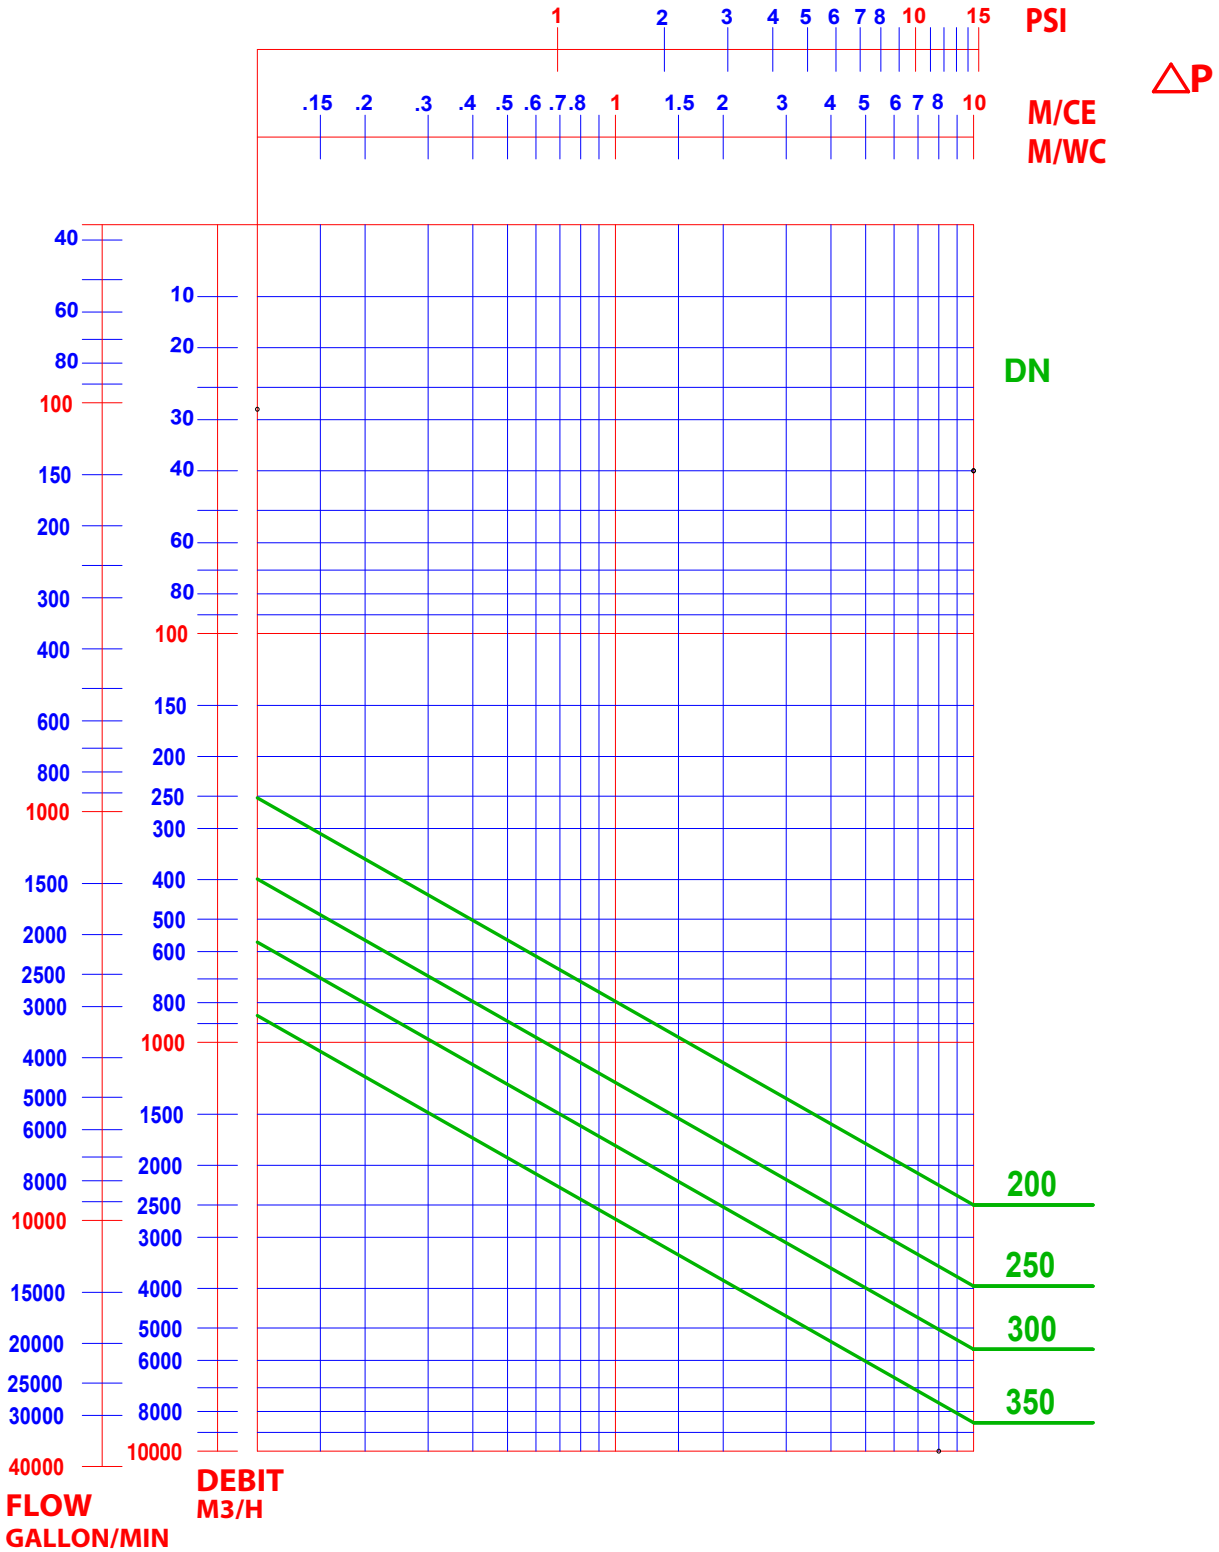

Type of flange

The Sylax 200-350 mm butterfly valve has been designed to be mounted on normalised standard flanges. Only standard flanges type 11, 21 and 34 according to EN 1092 are quite compatible.

For other types of flanges, refer to the table below.
Non appropriate connections will cancel our guarantee.

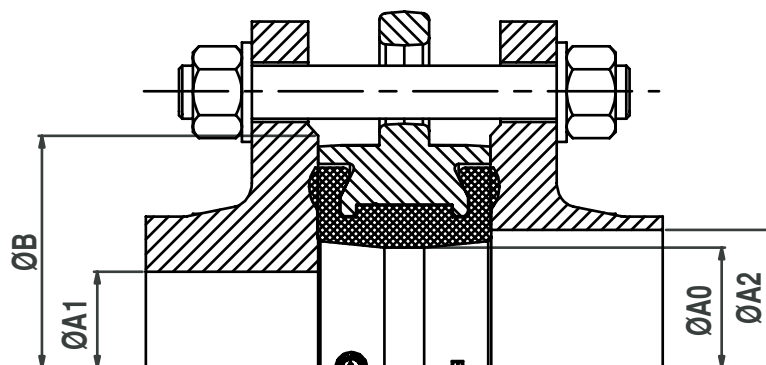


DN		Ø A0	Ø A1 mini	Ø A2 maxi	Ø B mini
200	8	200	196	224	258
250	10	250	246	280	312
300	12	300	296	329	365
350	14	340	335	369	415

NOTE :

The use of expansion seals, as well as the use of elastomer coated flanges, between the flange and the valve are strictly forbidden.

Tag / traceability

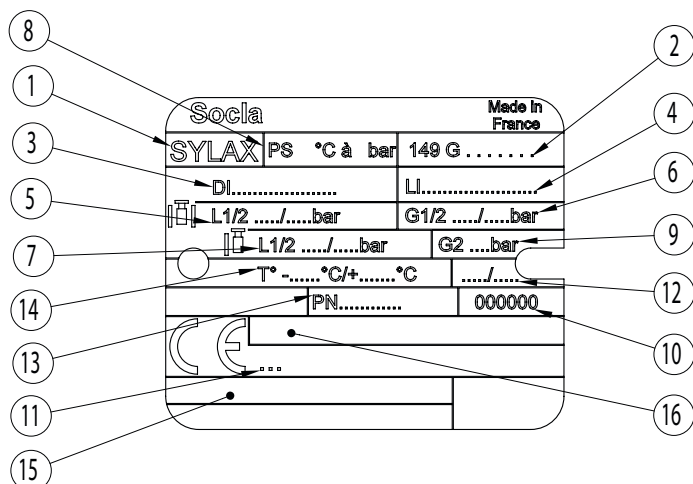

Rep	Description
1	Name of the valve
2	Reference
3	Material of the disc
4	Material of the liner
5	Pressure PS between flanges L1/L2 (liquid)
6	Pressure PS between flanges G1/G2 (gas)
7	Pressure PS end flange L1/L2 (liquid)
8	Pressure PFA water 20°C
9	Pressure PS end flange G2 (gas)
10	Number of manufacturing order
11	Notified Body Number for the Directive PED 97/23/CE
12	Manufacturing date
13	Connecting flanges
14	Limit of use
15	Approval information zone
16	Marking relating to the Directive ATEX 94/9/CE

143,687

Bolts and nuts

Note : Bolts and nuts are not part of our standard supply.

DN	NPS	a	e	EN 1092 PN6			EN 1092 PN10			EN 1092 PN16			EN 1092 PN25			ASME / ANSI B16.5 Class 150			
				* Nb rods or Nb screw	ØV	c	* Nb rods or Nb screw	ØV	c	* Nb rods or Nb screw	ØV	c	* Nb rods or Nb screw	ØV	c	* Nb rods or Nb screw	ØV Metric	ØV UNC**	c
200	8	60	28	8	M16	24	8	M20	26	12	M20	26	12	M24	32	8	M20	3/4"	26
250	10	68	32	12	M16	24	12	M20	26	12	M24	32	12	M27	32	12	M24	7/8"	26
300	12	78	36	12	M20	26	12	M20	26	12	M24	32	16	M27	32	12	M24	7/8"	26
350	14	78	36	12	M20	26	16	M20	26	16	M24	32	16	M30	36	12	M27	1"	32

* For flanges in cast or ductile iron 4 holes M16 and for flanges in steel 8 holes M16 on the same drilling circle.

DN	NPS	a	e	BS10-d			BS10-e			JIS2238 & JIS2239 5K			JIS2238 & JIS2239 10K			JIS2238 & JIS2239 16K		
				* Nb rods or Nb screw	ØV UNC	c	* Nb rods or Nb screw	ØV UNC	c	* Nb rods or Nb screw	ØV	c	* Nb rods or Nb screw	ØV	c	* Nb rods or Nb screw	ØV	c
200	8	60	28	8	5/8"	24	8	3/4"	26	8	M20	26	12	M20	26	12	M22	26
250	10	68	32	8	3/4"	26	12	3/4"	26	12	M20	26	12	M22	26	12	M24	32
300	12	78	36	12	3/4"	26	12	7/8"	26	12	M20	26	16	M22	26	16	M24	32
350	14	78	36	12	7/8"	26	12	7/8"	26	12	M22	26	16	M22	26	16	M30 x 3	36

* WAFER TYPE BODY, CENTRAL FLANGE BODY AND RING SHAPED TYPE BODY :

Assembly by rods : number of nuts and washer = 2 x Number of rods (above)

Assembly by bolts : Number of nuts = Number of screws (above) and number of washer = 2 x Number of nuts

* LUG TYPE BODY :

Assembly by screws : Number of screw per face (above) and number of washer is the same

* DOUBLE FLANGE BODY :

Assembly by rods : number of nuts and washers = 2 x Number of rods (above)

Assembly by rods + central nut :

Number of nuts = 2 x Number of rods (above)


Number of washers = 4 x Number of rods (above)

Number of thin nuts for central position = 1 x Number of rods (above)

** ASME / ANSI B16.5 Class 150 : **Standard** version : metric threading; UNC threading : please consult us.

Bolts and nuts

For wafer type and central flange type body ; assembly by rods :

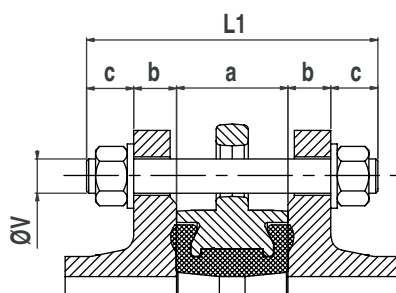


$$L1 = a + 2(b+c)$$

L1 = minimum length of rods

a = width of the butterfly valve (face to face dimension)


b = thickness of the flange (customer)

c = thickness of washer + thickness of nut + exceeding length of the rod.

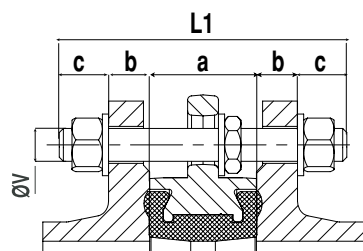

Mounting in case of downstream pipework dismantling (see page 9).

Use nuts with reduced face-to-face dimensions between the butterfly valve and the downstream flange.

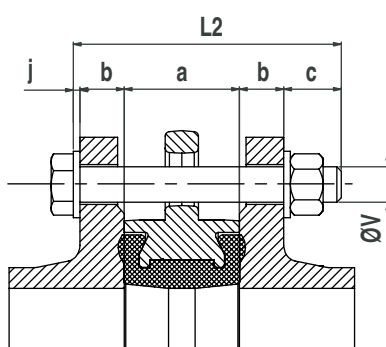

For wafer type and central flange type body ; assembly by bolts :

$$L2 = a + 2b + c + j$$


L2 = minimum length under head of screw

a = width of the butterfly valve

b = thickness of the flange (customer)

c = thickness of washer + thickness of nut + exceeding length of the rod


j = thickness of washer at the head of the screw.

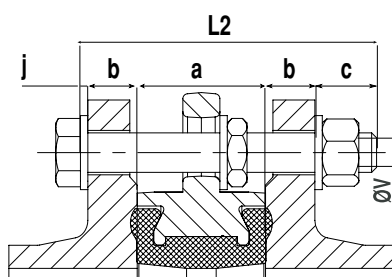

Mounting in case of downstream pipework dismantling (see page 9).

Use nuts with reduced face-to-face dimensions between the butterfly valve and the downstream flange.

Bolts and nuts

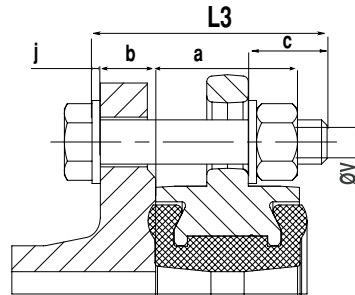

For flange type body (permanent downstream dismantling) ; assembly by bolts :

$$L3 = a/2 + b + c + j$$


L3 = minimum length under head of screw

a = width of the butterfly valve

b = thickness of the flange (customer)

c = thickness of washer + thickness of nut + exceeding length of the rod

j = thickness of washer at the head of the screw

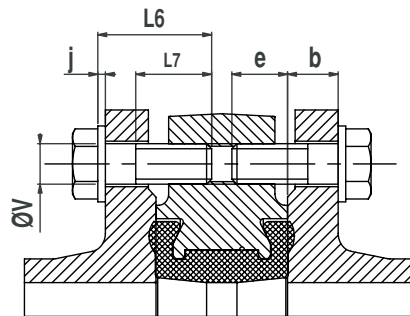

For lug type body and double flange body DN350; assembly by screws :

$$L6 \leq b + e + j \text{ with } L7 \geq L6 - (b + j)$$

L6 = maximum length under head of screw


L7 = minimum length of the threading of the screw

a = width of the butterfly valve (face to face dimension)

b = thickness of the flange (customer)

e = maxi depth of screw

j = thickness of washer

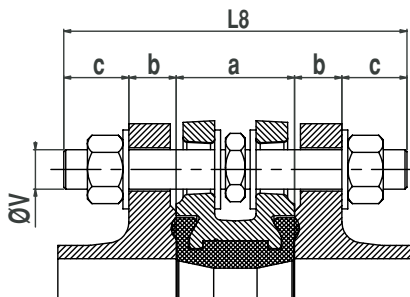

For double flange body ; assembly by rods :

$$L8 = a + 2(b+c)$$

L8 = minimum length of rods

a = width of the butterfly valve

b = thickness of the flange (customer)

c = thickness of washer + thickness of nut + exceeding length of the rod

Installation

• General remarks :

For safety reasons, the installation must take place under the supervision of authorised people taking account of local safety instructions and advice.

The handling of butterfly valves and their controls must be done by staff trained in all technical aspects of their operation.

Before installation the pipes must be depressurised and purged (empty of its fluid) in order to avoid any danger to the operator.

The pipe work must be correctly aligned so that no extra stress is exerted on the valve casing.

In ATEX zone, check that the pipes are connected to the earth. Do not use insulating pipes (PVC....)

Check the compatibility of the connection flanges against the operating pressure : the PN number of the flanges must be greater or equal to the operating pressure.


The valve is a machined piece of equipment and must not be used to prise apart the flanges.

An **instruction notice** specifying the installation characteristics and the commission of the Sylax 200-350 mm is added to every product. It is available on our web site **www.socla.com** or on request by our sales department.

• Installation conditions :

It is recommended that the distances mentioned below be respected in order to prolong the life time of the valve.

Mounting the valve close to pipe work junctions places it in turbulent zones which increase its wear.

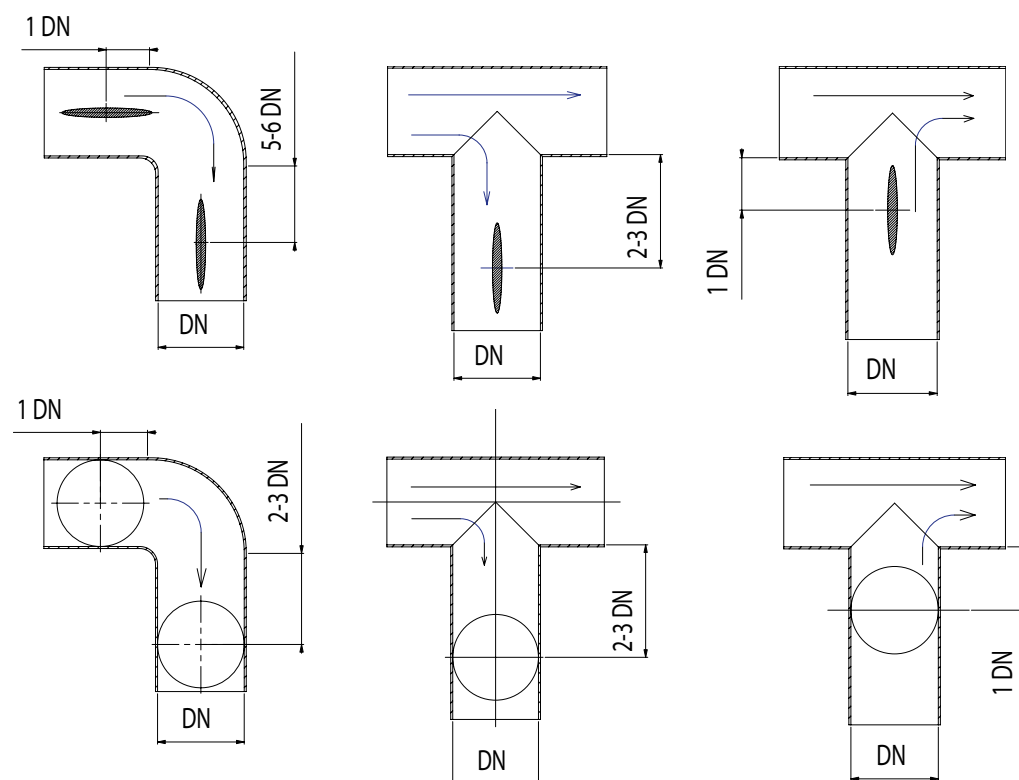

Socla can accept no responsibility for possible errors in catalogue, brochures and other printed material. Socla reserve the right to alter its products without notice. This also applies to products already agreed. All trademarks in this material are the property of the respective companies. All right reserved.

Socla sas

365 rue du lieutenant Putier
71530 VIREY LE GRAND
Postal address : CS 10273
71107 CHALON SUR SAONE Cedex

Tel : 33 3 85 97 42 52
Fax : 33 3 85 97 97 42
<http://www.socla.com>
e-mail:commerfr@socla.com